


Lock tilt



466323 rev00

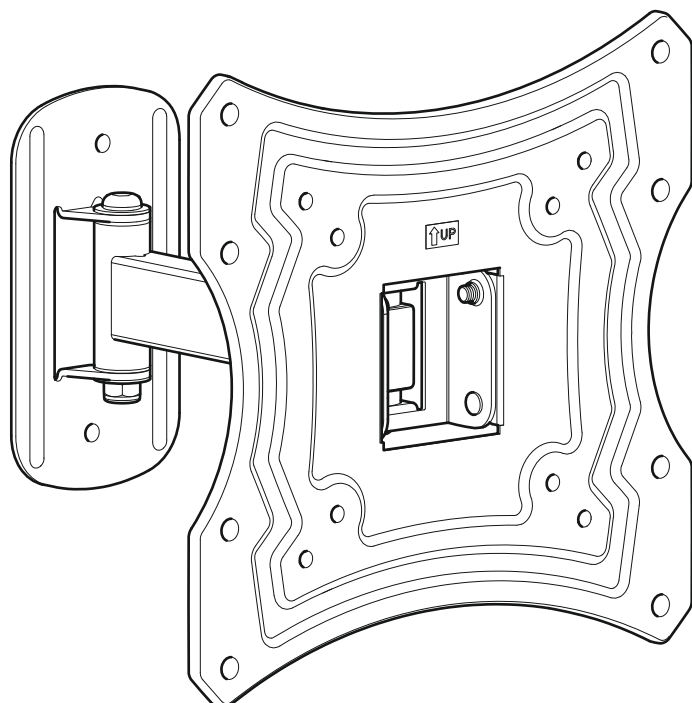


Read the operating instructions and keep them in a safe place.
If you have any questions about this product or issues with installation
contact the help line before returning this product to the store.

Help Line: **0333 320 8027**

Monday - Thursday 08:30 - 17:00 Friday 08:30 - 16:00
Calls charged at local rate



39"
MAX




100 x 100mm
200 x 100mm
200 x 200mm



2 Deciding the correct screw and spacer combination



When deciding which screw diameter and length is suitable for your TV it is important to **STOP** immediately as soon as you feel any resistance to prevent damage to your TV





You are provided with 3 diameters of TV fixing screws, **M4**, **M6** and **M8**. Determine the screw diameter that fits and remember for the next step





Do I need to use spacers **D**?

Spacers are provided so that you can achieve the correct fit between the back of your TV and Mounting Plate, please see below for examples of when spacers are required



No
TV has flat back and flush fixing holes



Maybe
TV has flat back with recessed fixing holes

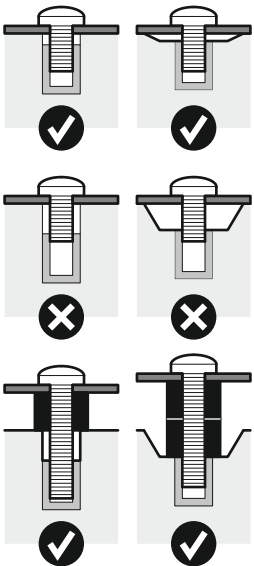



Yes
TV has irregular or obstructed back

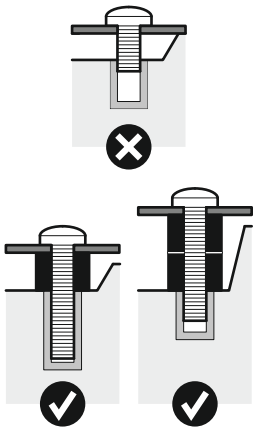

3 Fitting the TV Mounting Plate

C1 or C2
C3 or C4
C5 or C6
B1 or B2 only required for certain screws
D x1 or x2 if required

Top



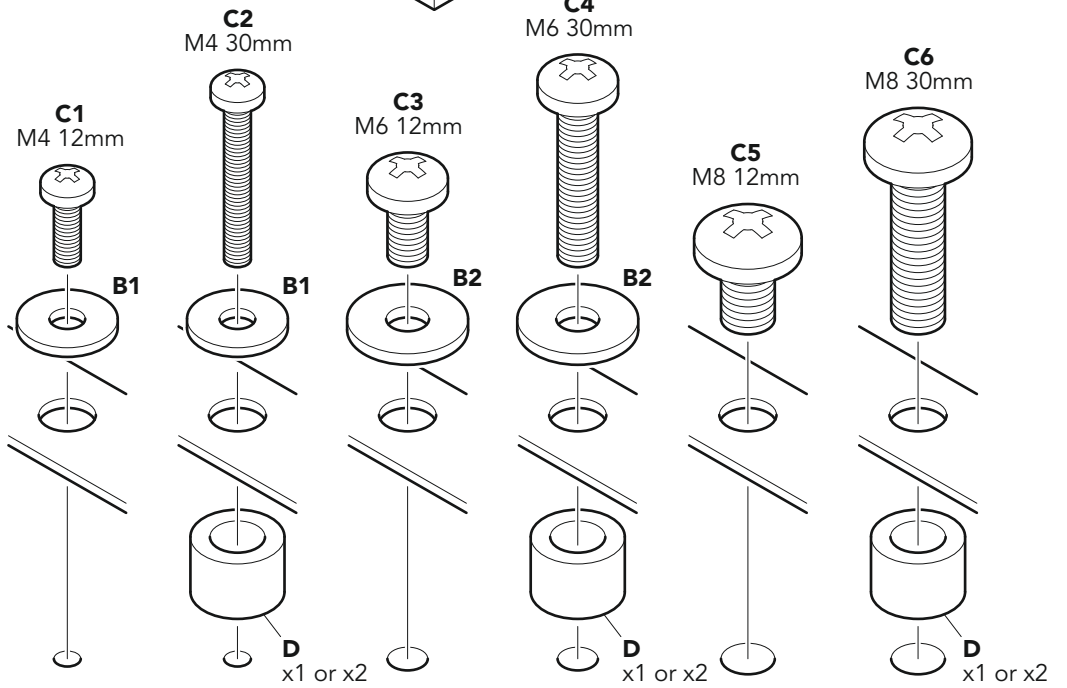
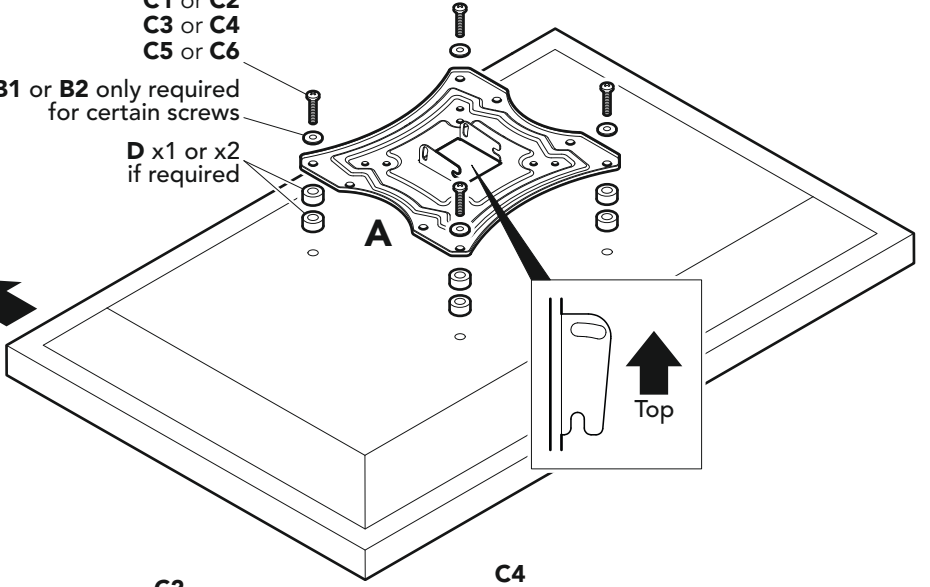


Attach the bracket to the back of your TV using a suitable combination of screw, washer and spacer combinations. **DO NOT OVERTIGHTEN!**






After completing step 3 you will have fittings left over, please keep in a safe place for future reference

4 Solid Wall

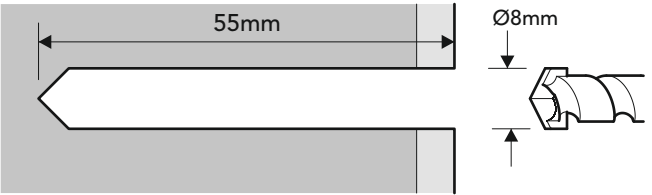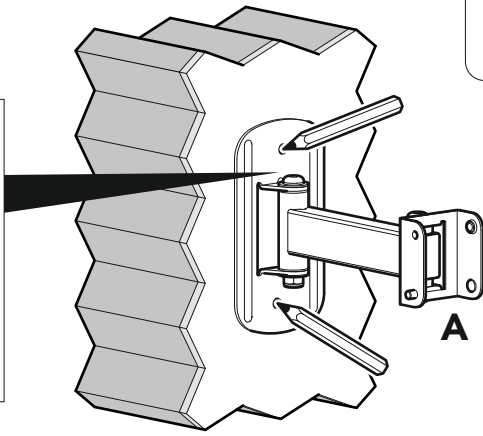

Remove dust from hole


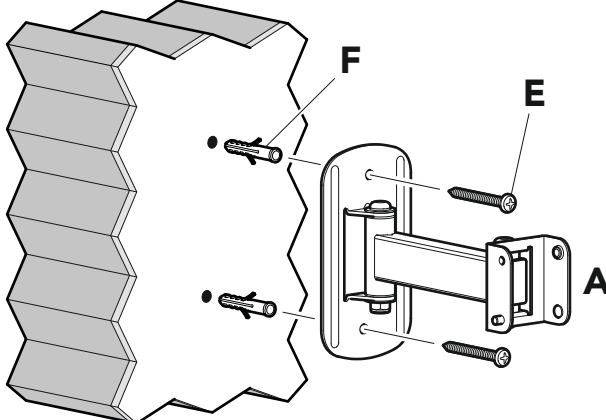



Tighten with hand tools only







Lubricate screw thread with soap

4 Wood Stud

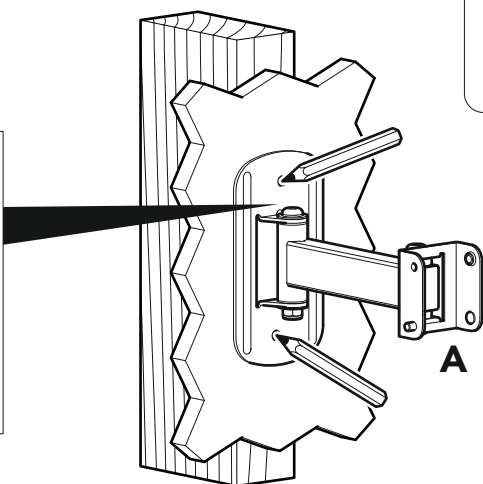

Ensure drill marks are in the centre of the wood stud

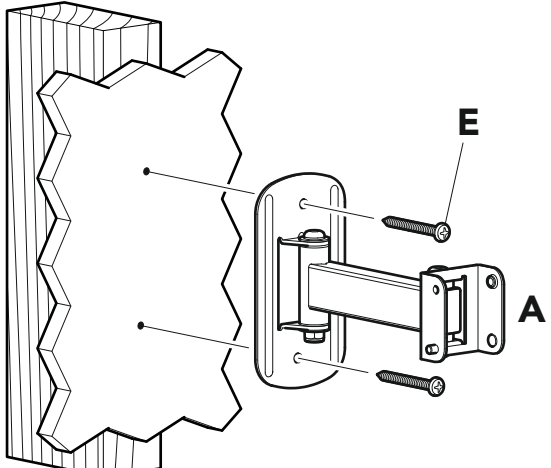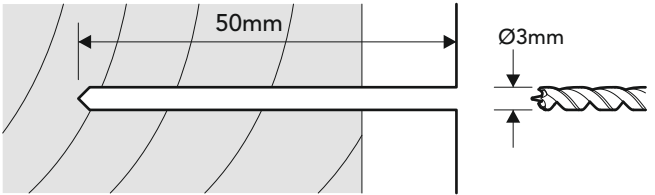

Do not use **F** wall plugs in wood stud



Tighten with hand tools only



Lubricate screw thread with soap