




4 Deciding the correct screw and spacer combination

! When deciding which screw diameter and length is suitable for your TV it is important to **STOP** immediately as soon as you feel any resistance to prevent damage to your TV



You are provided with 4 diameters of TV fixing screws, **M4, M5, M6 and M8**. Determine the screw diameter that fits and remember for the next step





Do I need to use spacers T11 or T12?

Spacers are provided so that you can achieve the correct fit between the back of your TV and Mounting Plate, please see below for examples of when spacers are required





No

TV has flat back and flush fixing holes






Maybe

TV has flat back with recessed fixing holes




Yes


TV has irregular or obstructed back




5 Fitting the TV Mounting Plate

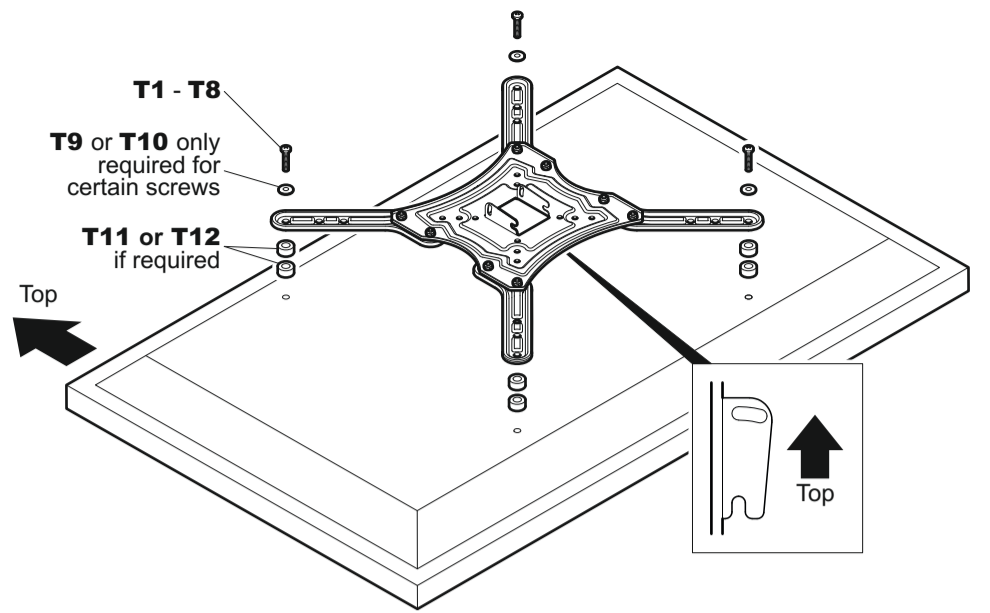


T1/T2




T3/T4



T5/T6



T7/T8




T12

If required



T11

and / or



Attach the bracket to the back of your TV using a suitable combination of screw, washer and spacer combinations. **DO NOT OVERTIGHTEN!**







After completing step 5 you will have fittings left over, please keep in a safe place for future reference




6 Solid Wall



Get it right with our easy to use online TV Height Calculator at myTVMount.com

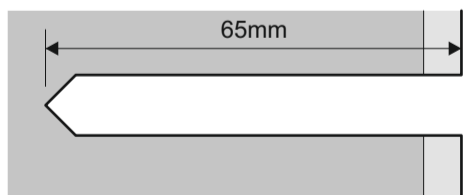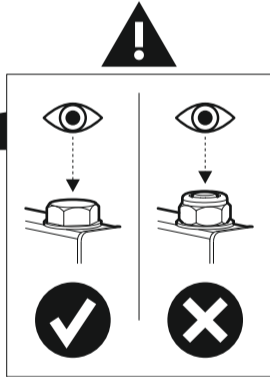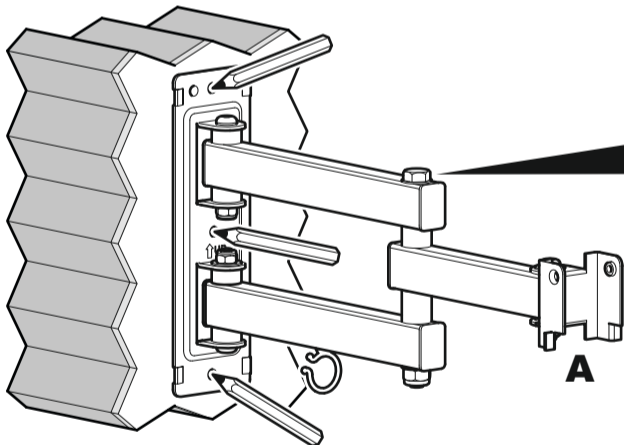

Remove dust from hole



Tighten with hand tools only






Lubricate screw thread with soap




6 Wood Stud



Get it right with our easy to use online TV Height Calculator at myTVMount.com

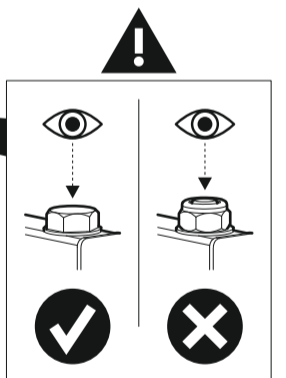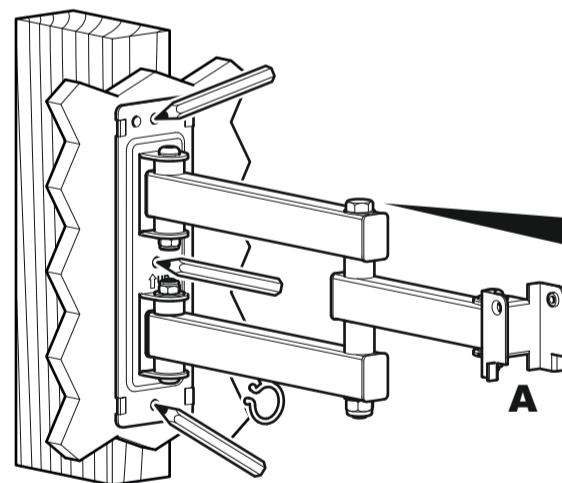

Ensure drill marks are in the centre of the wood stud

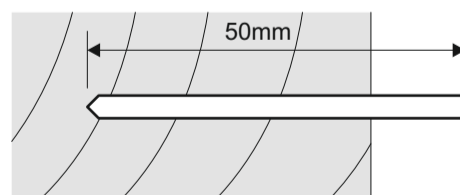

Do not use **W2** wall plugs in wood stud



Tighten with hand tools only



Lubricate screw thread with soap