


jl.avfgroup.com



466524 rev01

JGL204

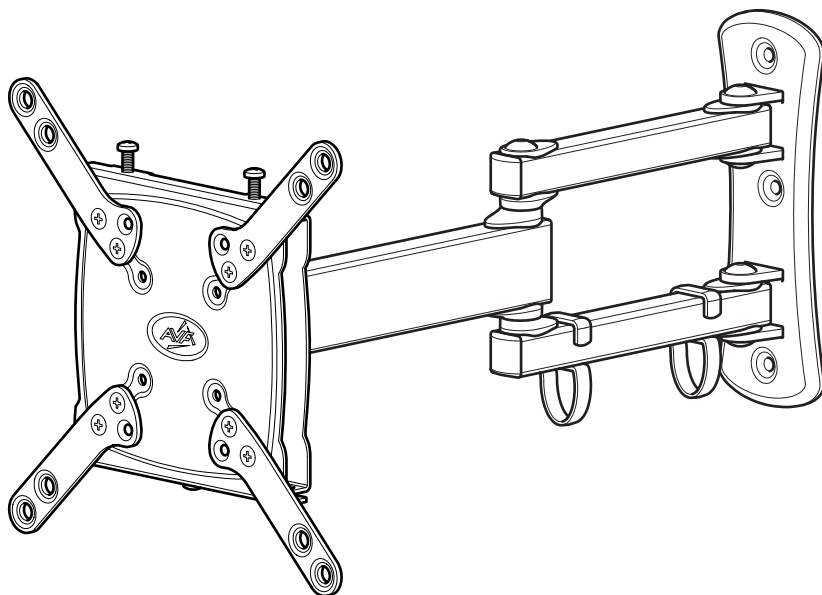

20kg
44lbs



Read through **ALL** instructions before commencing installation.


If you have any questions about this product or issues with installation, contact the customer services help line before returning this product to the store.

CUSTOMER SERVICES HELP LINE NUMBER: 0333 320 0463


AVF Group Ltd. Hortonwood 30, Telford, Shropshire, TF1 7YE, England

Assembly Overview


Fit the TV Mounting Plate

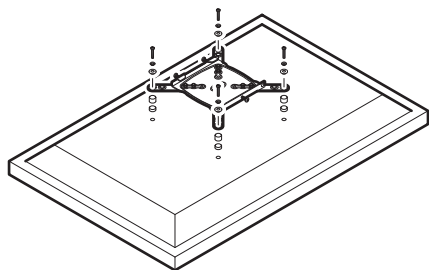


Fit the Wall Bracket



Connect the TV



Suitable Wall Types



Solid Wall



Wood Stud


Tools Recommended








Stud Finder



Ø10mm (25/64")
Masonry



Ø3mm (1/8")
Wood

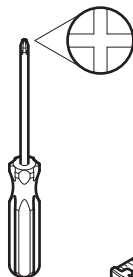

Index

1 Measure the TV fixing holes Width and Height

2 Preparing the TV Mounting Plate

3 Fitting the TV Mounting Plate

4 Fitting the Wall Bracket

5 Connecting the TV

Retain all packaging in case the bracket needs to be returned.

Contents may vary from photography/ Illustrations.


You will not need all these parts, so expect there to be some left over depending upon the specification of your TV.

This product is intended for indoor use only. Use of this product outdoors could lead to failure and personal injury.




It is the responsibility of the installer to ensure that the mounting wall is of a suitable standard and void of any services (eg gas, electricity, water etc).

AVF accept no responsibility for any damage or loss caused by installing this product in a sub standard wall.


Boxed Parts

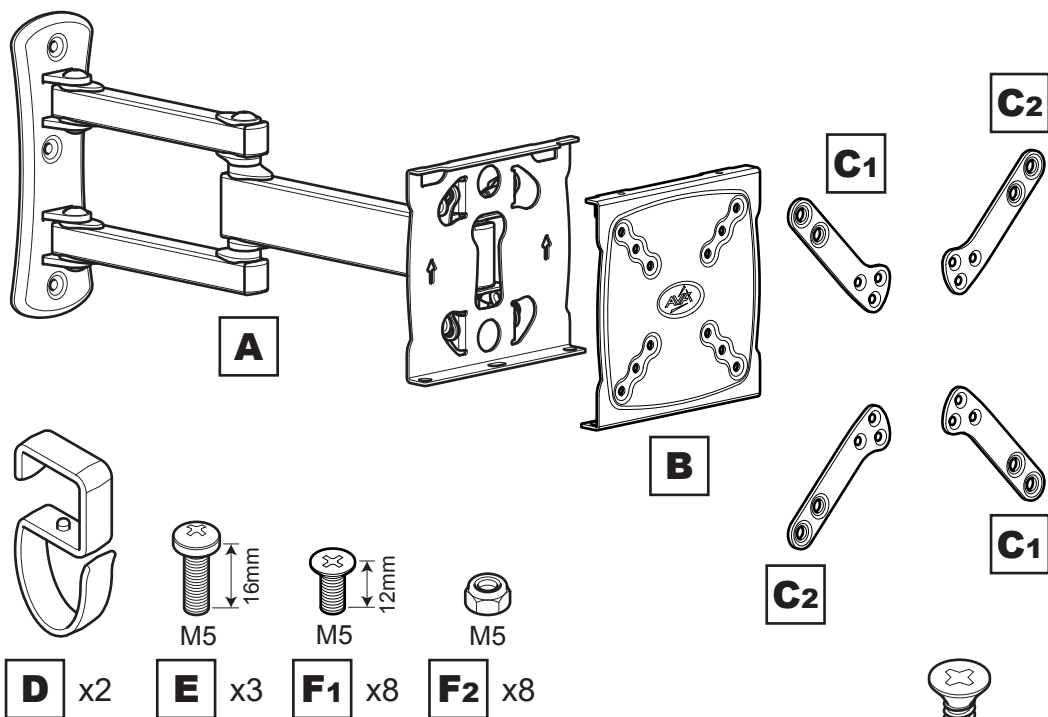


TV Screws, Reducers and Spacers Vis TV, réducteurs et séparateurs Tornillos, Reductores y Espaciadores para TV

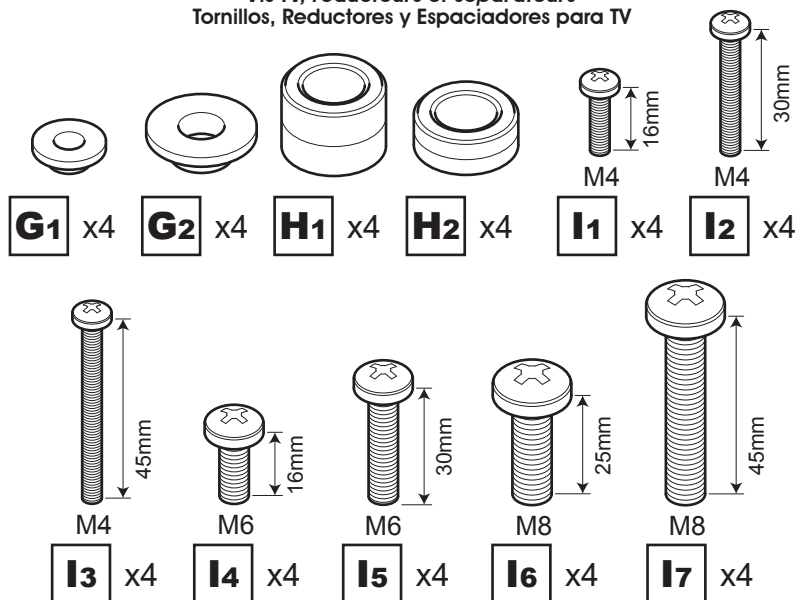

1 Measure the TV fixing holes Width and Height

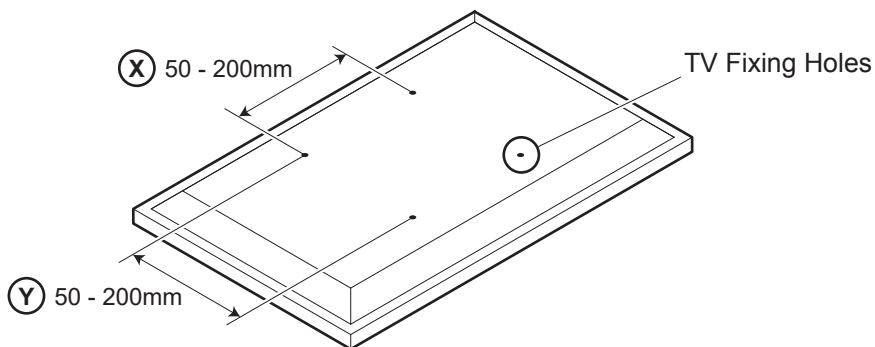

If width (X) is greater than 200mm or height (Y) greater than 200mm STOP installation now and contact the customer help line.



M4 = I1-I3


M6 = I4/I5

M8 = I6/I7

You are provided with 3 diameters of TV fixing screws, **M4**, **M6** and **M8**. Determine the screw diameter that fits and remember for step 3.



Please note that when the TV wall mount is flat to wall your TV will be 50mm off centre to the wall plate. Please consider this before you drill the wall.

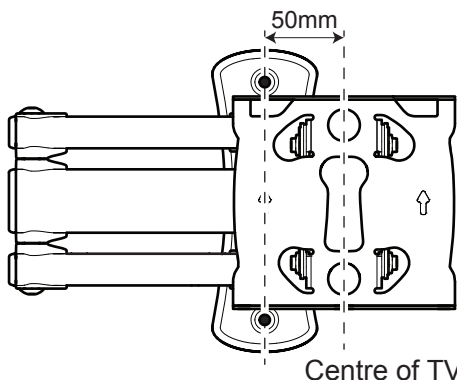

2 Preparing the TV Mounting Plate

Use the option that fits your TV

OPTION 1

- (X) 50mm x (Y) 50mm
- (X) 75mm x (Y) 75mm
- (X) 100mm x (Y) 100mm

OPTION 2


- (X) 100mm x (Y) 200mm
- (X) 200mm x (Y) 100mm

OPTION 3


- (X) 200mm x (Y) 200mm

If in any doubt please call the customer help line


OPTION 1

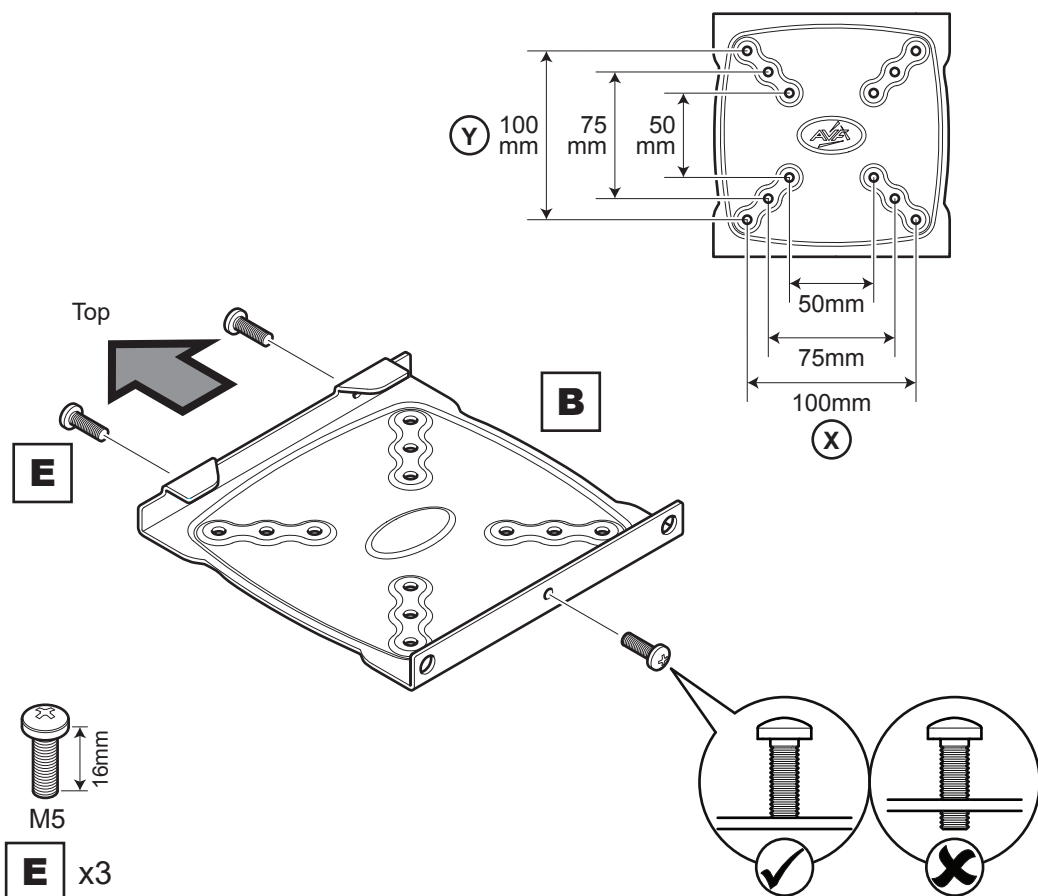

OPTION 2



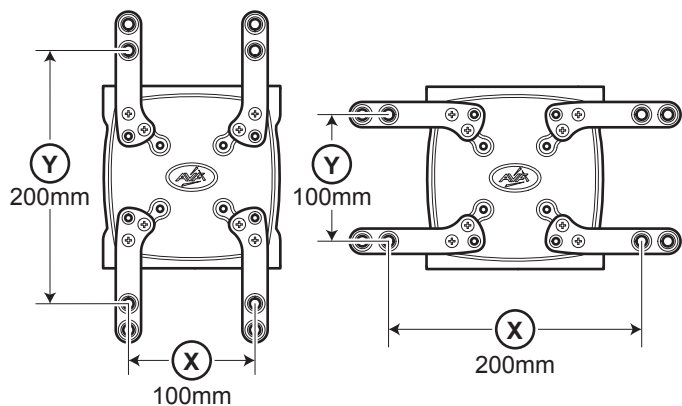


OPTION 3




Example shown is 200 x 200 fixings

Top

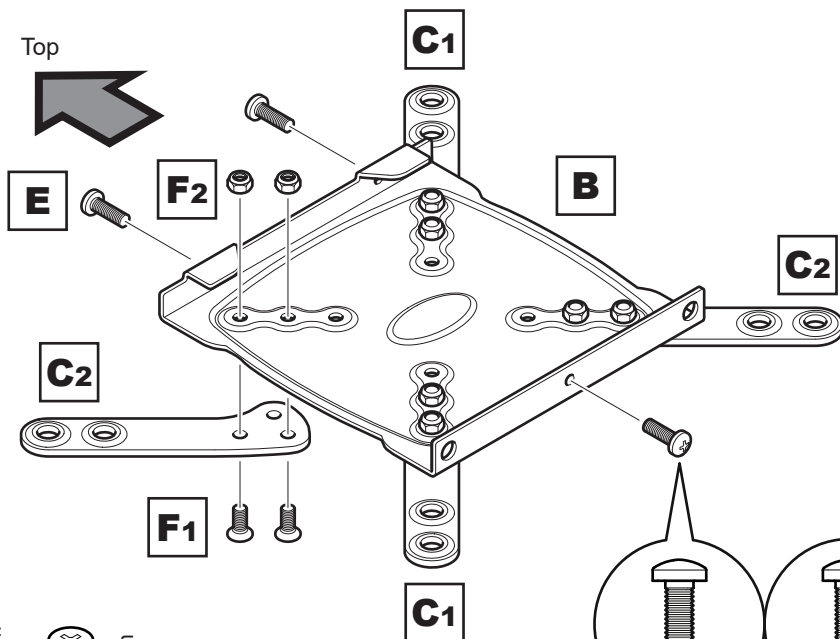


E x3 **F1** x8 **F2** x8

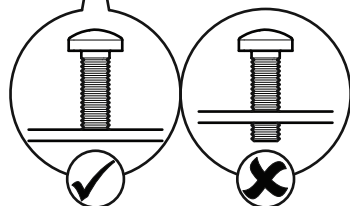

3 Fitting the TV Mounting Plate


No Spacers

For TVs with flat / unobstructed back.




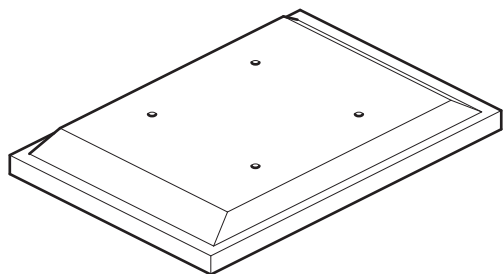


Spacers **H1/H2**


For TVs with irregular / obstructed back.

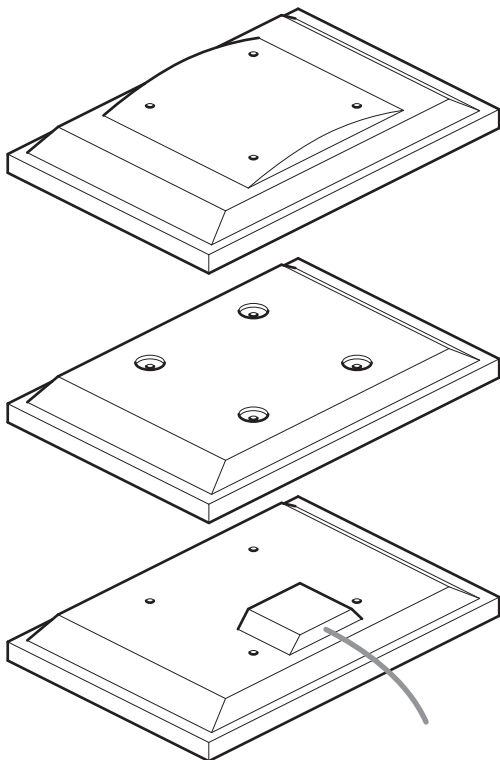

WARNING

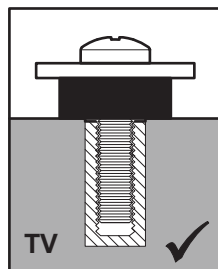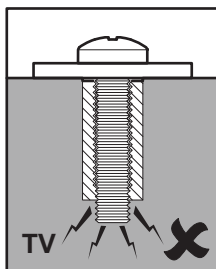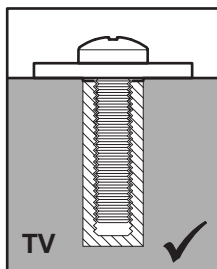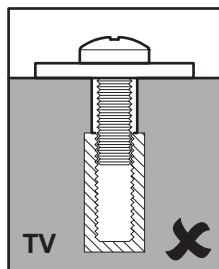


After completing step 3 you will have fittings left over, please keep for future reference.

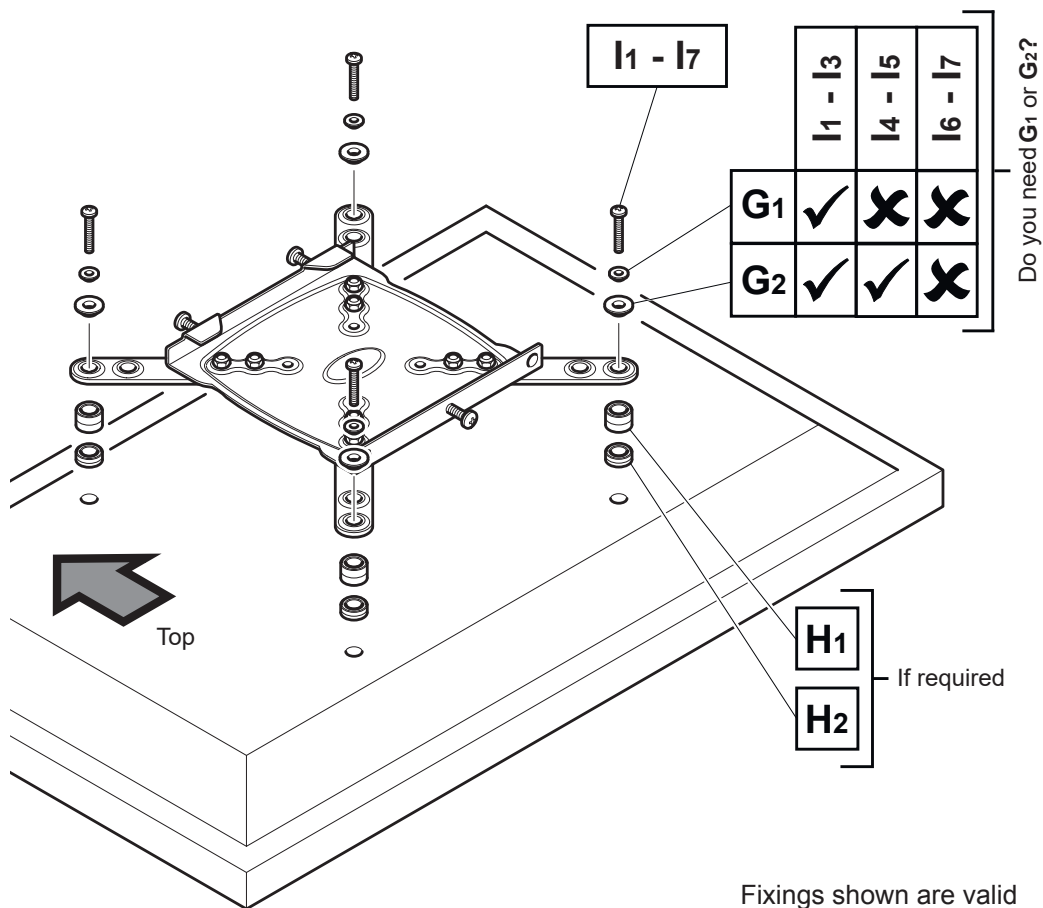

Attach the bracket to the back of your TV using suitable screw, reducer and spacer combinations.


4 Fitting the Wall Bracket

Solid Wall



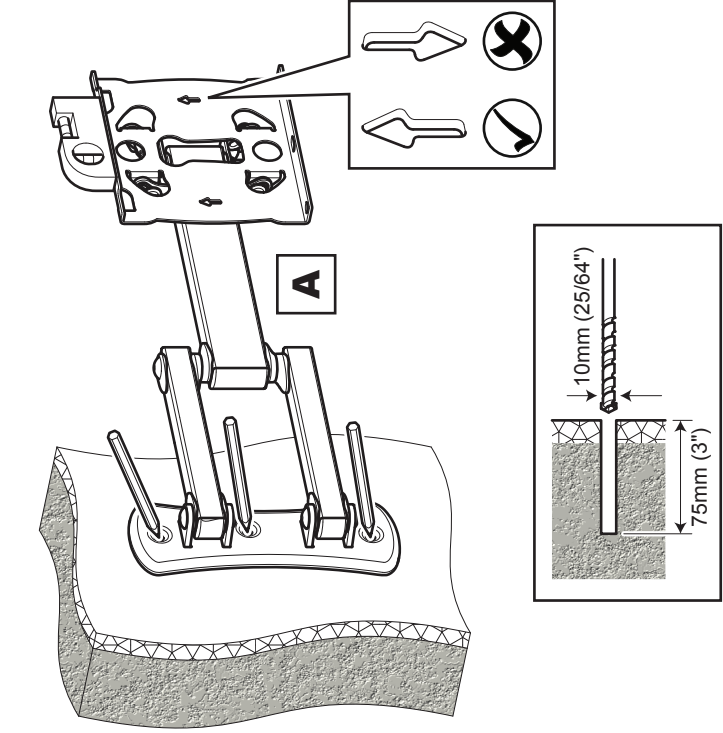


Remove Dust from Hole.

Wood Stud

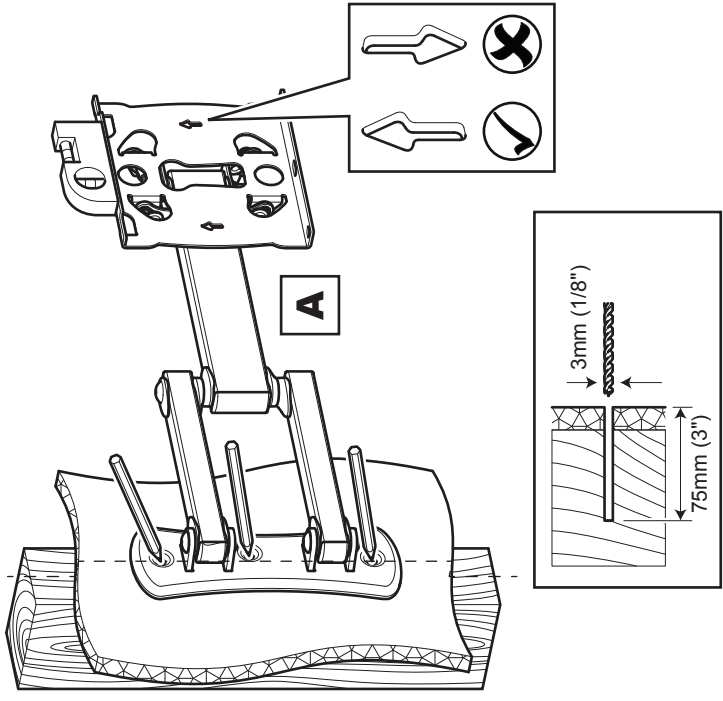

Ensure bracket is in the centre of the wood stud

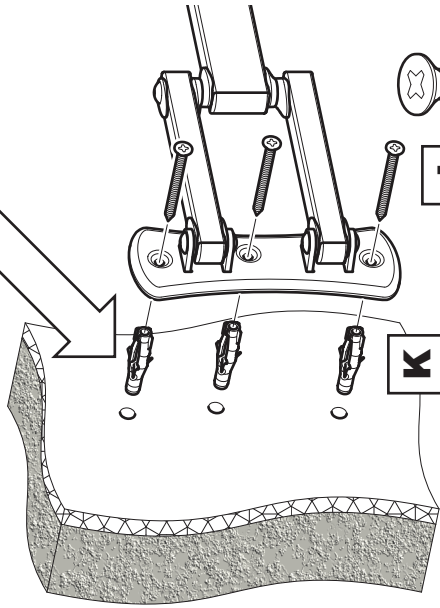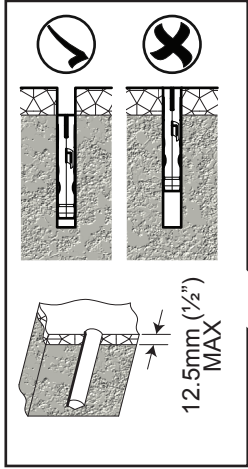

Lubricate screw thread with soap.


DO NOT overtighten screws.
Tighten screws by hand only.



x3



x3

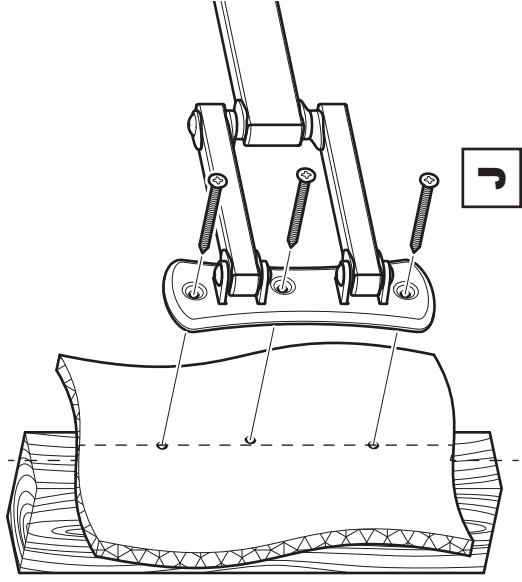

Lubricate screw thread with soap.


DO NOT overtighten screws.
Tighten screws by hand only.





x3

5 Connecting the TV

Attaching and Locking

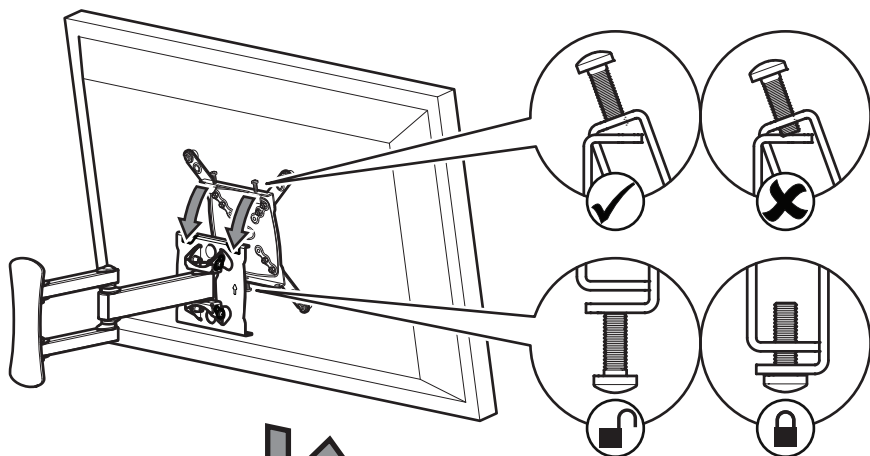

TV Levelling

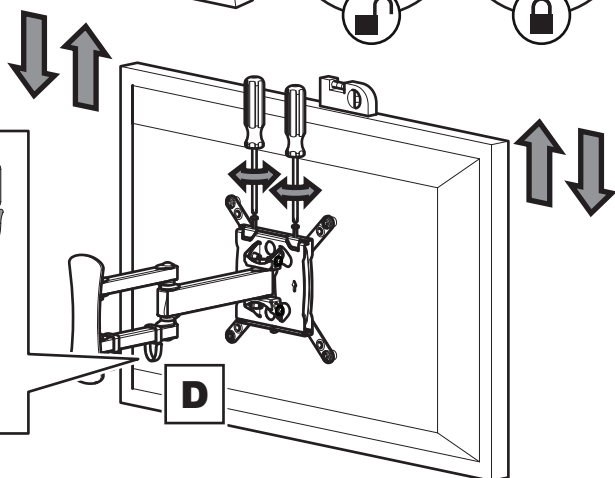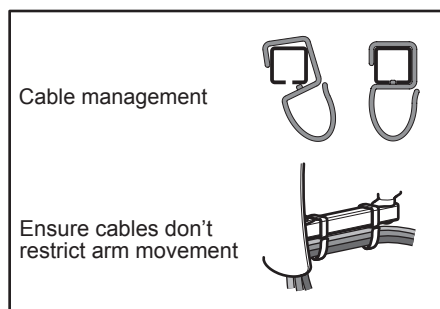

Optional

Lock tilt

