


 18 kg / 39 lb.


**Please read these instructions thoroughly before installation.**



## You will need

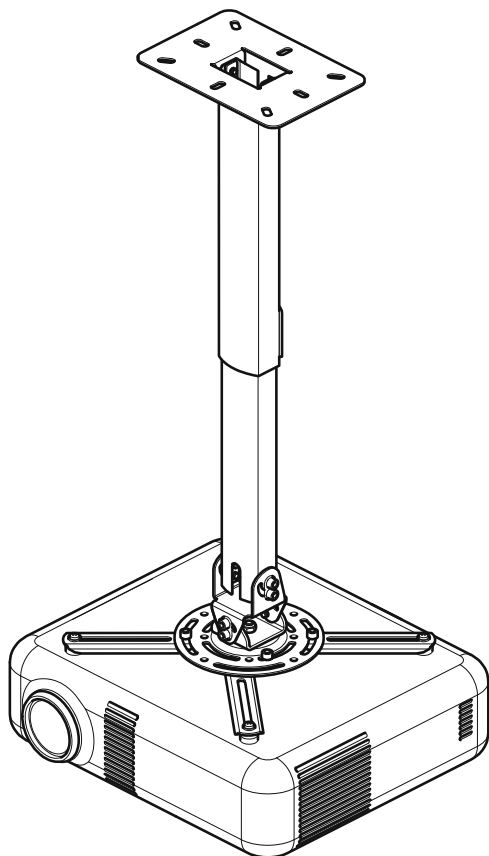

Stud Finder



Ø3mm  
( 1/8" )

Ø10mm  
( 25/64" )

Wood Stud

Solid Wall

## Helpline

0333 320 0463 (UK)

1300 762 219 (Australia)

(09) 9302 0077 (New Zealand)



## Product Information




**UK** - AVF Group Ltd. Hortonwood 30, Telford, Shropshire, TF1 7YE, England


**Australia** - Arisit P/L · 40-50 Mark Anthony Drive · Dandenong · South Victoria · 3175

**New Zealand** - Arisit P/L · 1a Howe Street · Newton · Auckland · 1145 · New Zealand


# Parts Included

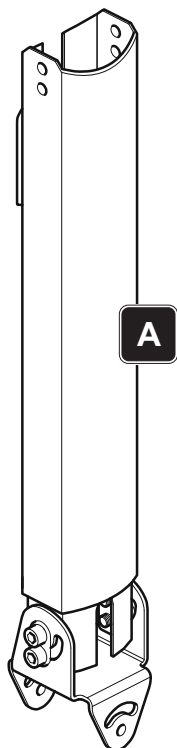


**A**

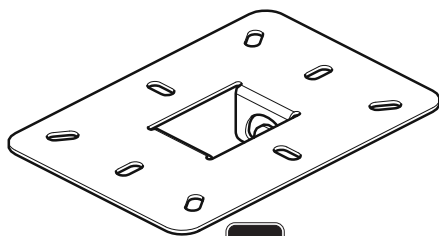

**B**



**C**

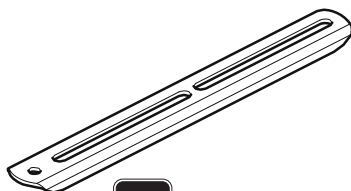

**D1**

**x4**




**D2**

**x2**




**E**

**x4**




**F**

**x2**



**G**

**x12**



**H**

**x4**



**I1**

**x4**



**I2**


**x4**



**J**

**x4**


## Projector Screws



**M3**

**K1**


**x4**



**M4**

**K2**


**x4**



**M5**

**K3**

**x4**



**M6**

**K4**


**x4**



**1/4"**  
**UNC**

**O**

**x1**



**L**

**x2**



**M**

**x2**



**4mm**


**N**

1


## Measure the Projector Fixing Holes



Projector fixing holes must be within the shaded area or the projector must have a single central fixing hole.

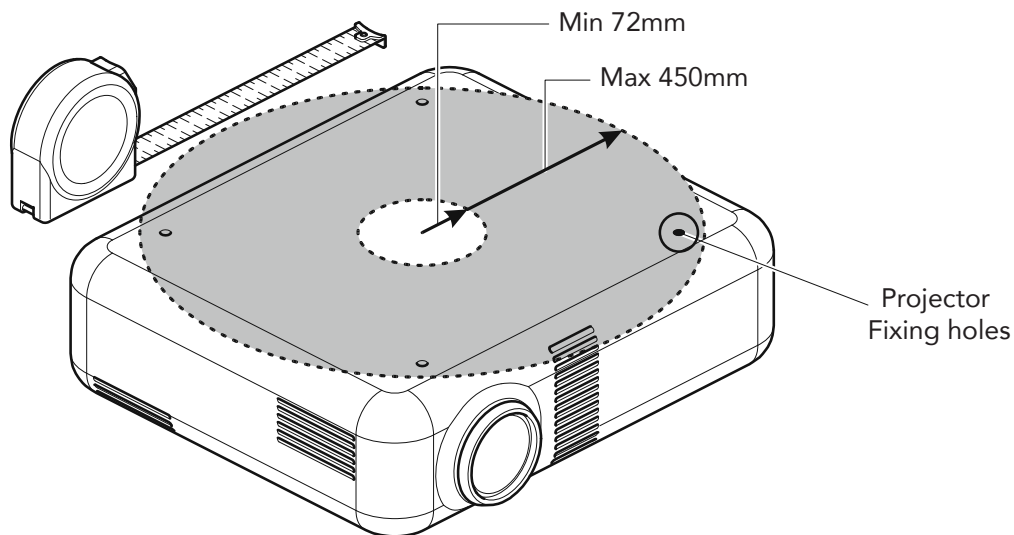

If your Projector fixing holes are not within the shaded area STOP installation now and contact the customer helpline.

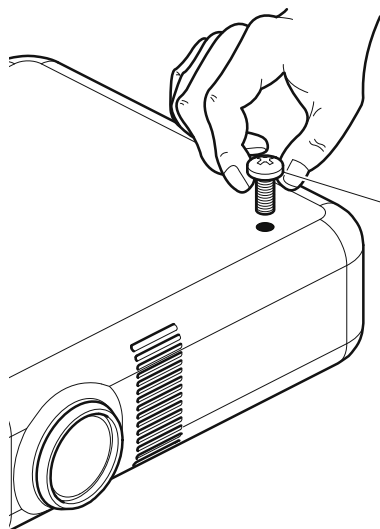

M3 = **K1**

M4 = **K2**

M5 = **K3**

M6 = **K4**

Determine which diameter screws fit your projector and put them to one side.


M3, M4, M5 or M6

**2**

## Prepare the Projector Mounting Bracket

**i** Configurations are not limited to the examples shown below. Use the parts supplied in any configuration to suit your projector.

### Single Central Fixing Point




**i** Disassemble C  
See Step 3


### Extra Small




### Small




### Medium

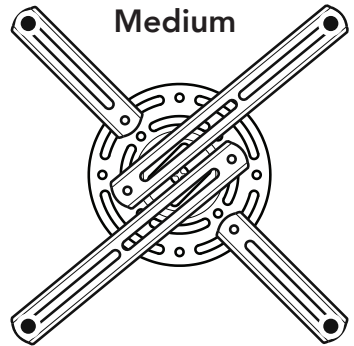




### Large

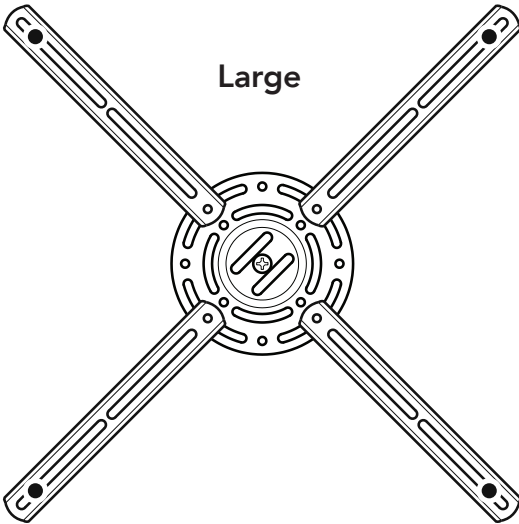

### Triangular


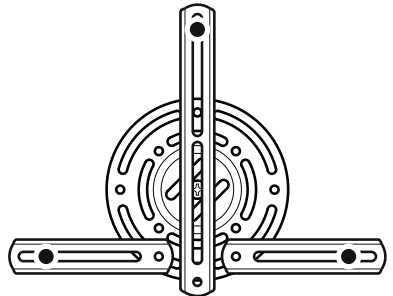


The example shown below is the medium hole configuration.

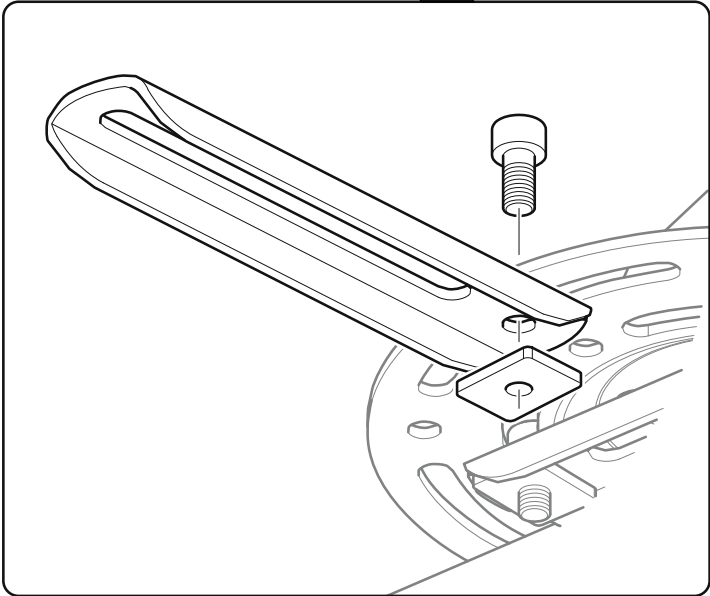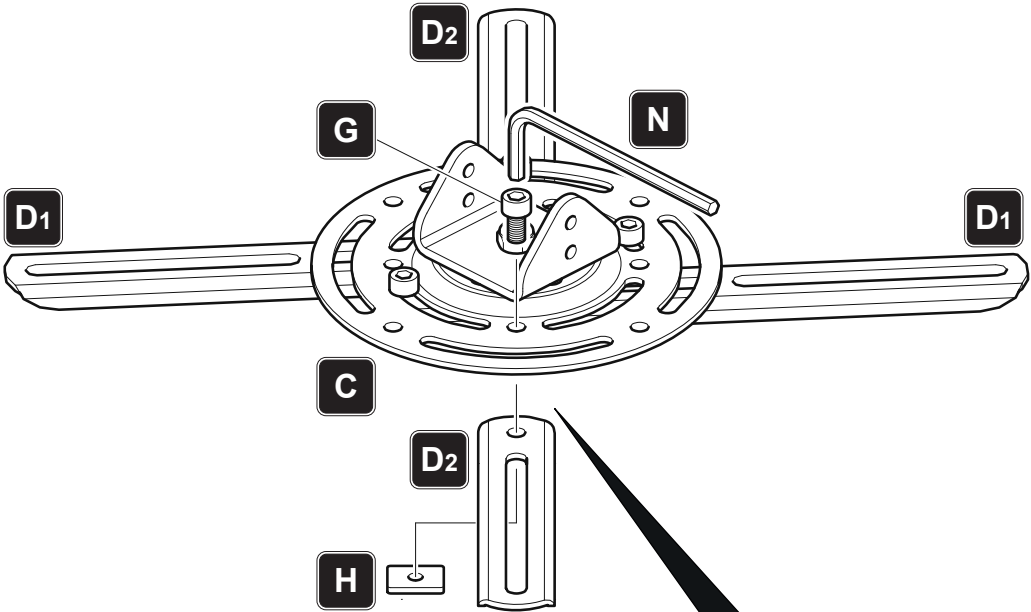




# 3

## Fitting the Projector Mounting Bracket

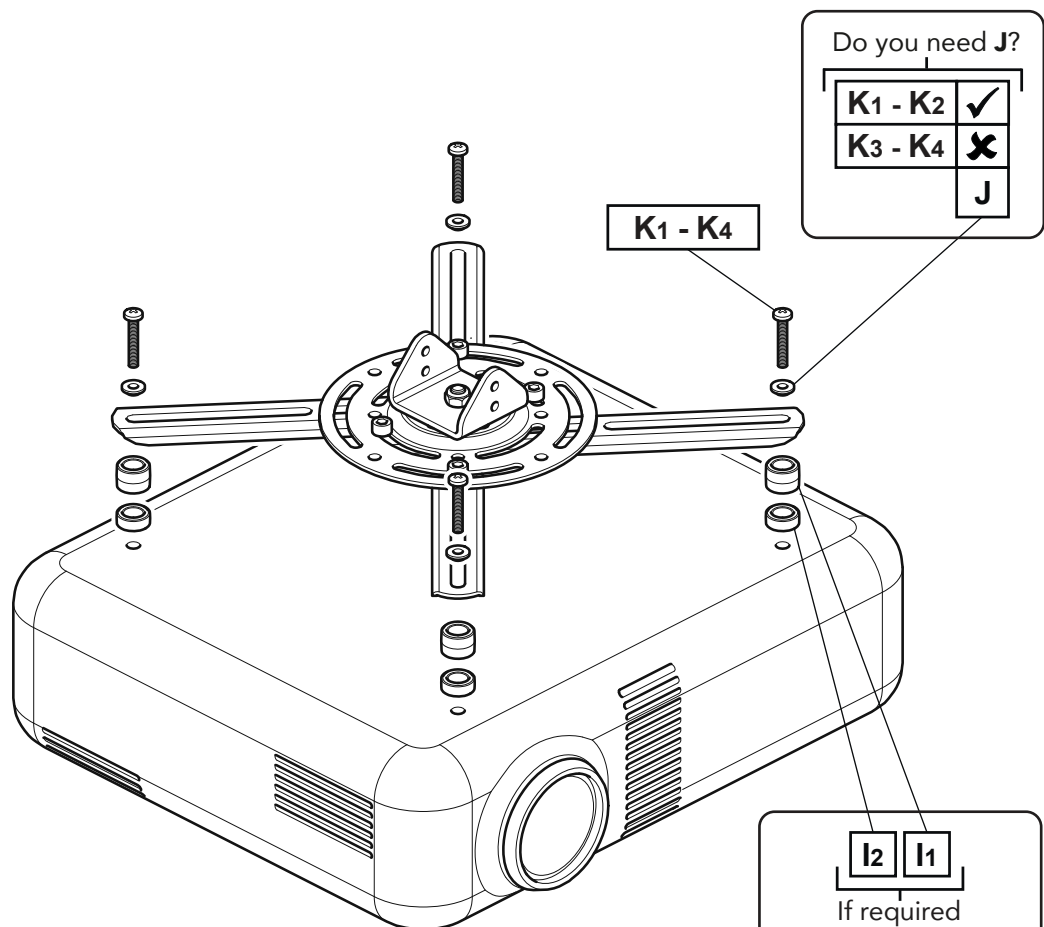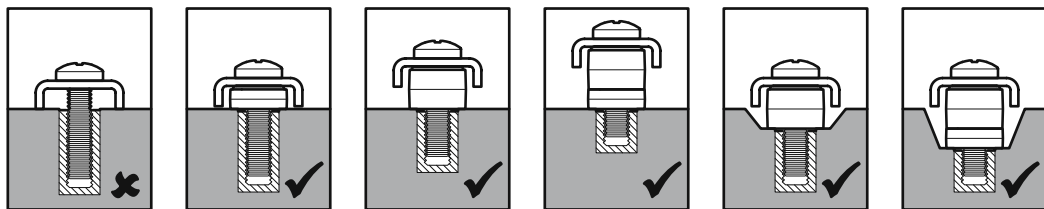

## For Projectors with a Single Central Fixing Hole


Remove the circular plate from part C.

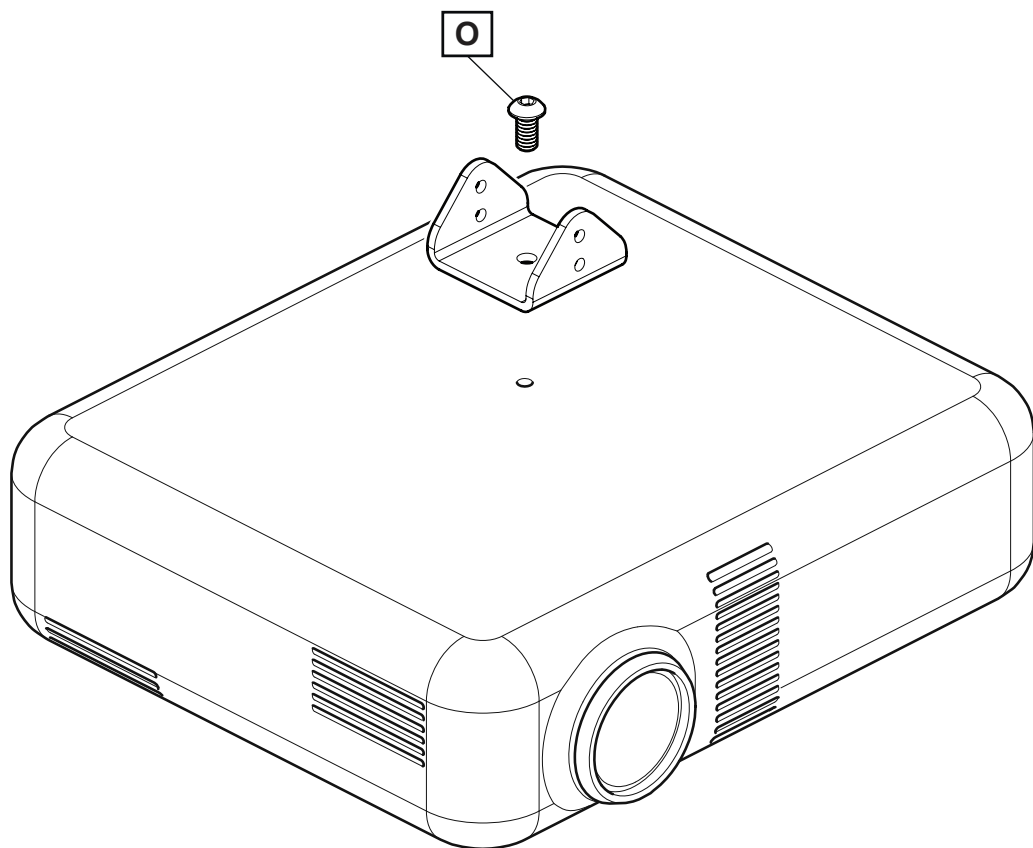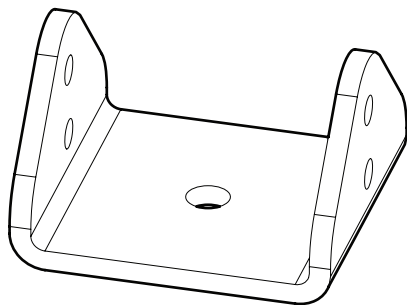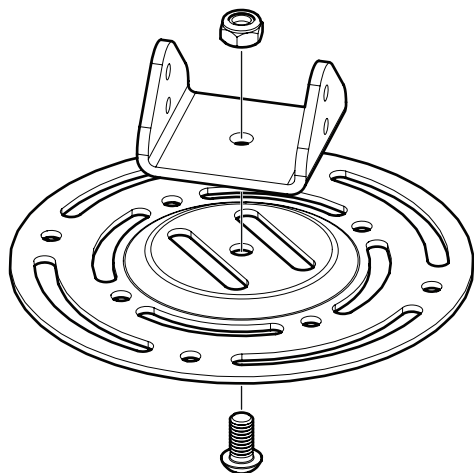

## 4 Attach the Ceiling Bracket to the Extendable Post



If you have chosen not to use the extendable post **A**, please ignore Steps 4 and 5. You will then fit the ceiling bracket as per Step 6.

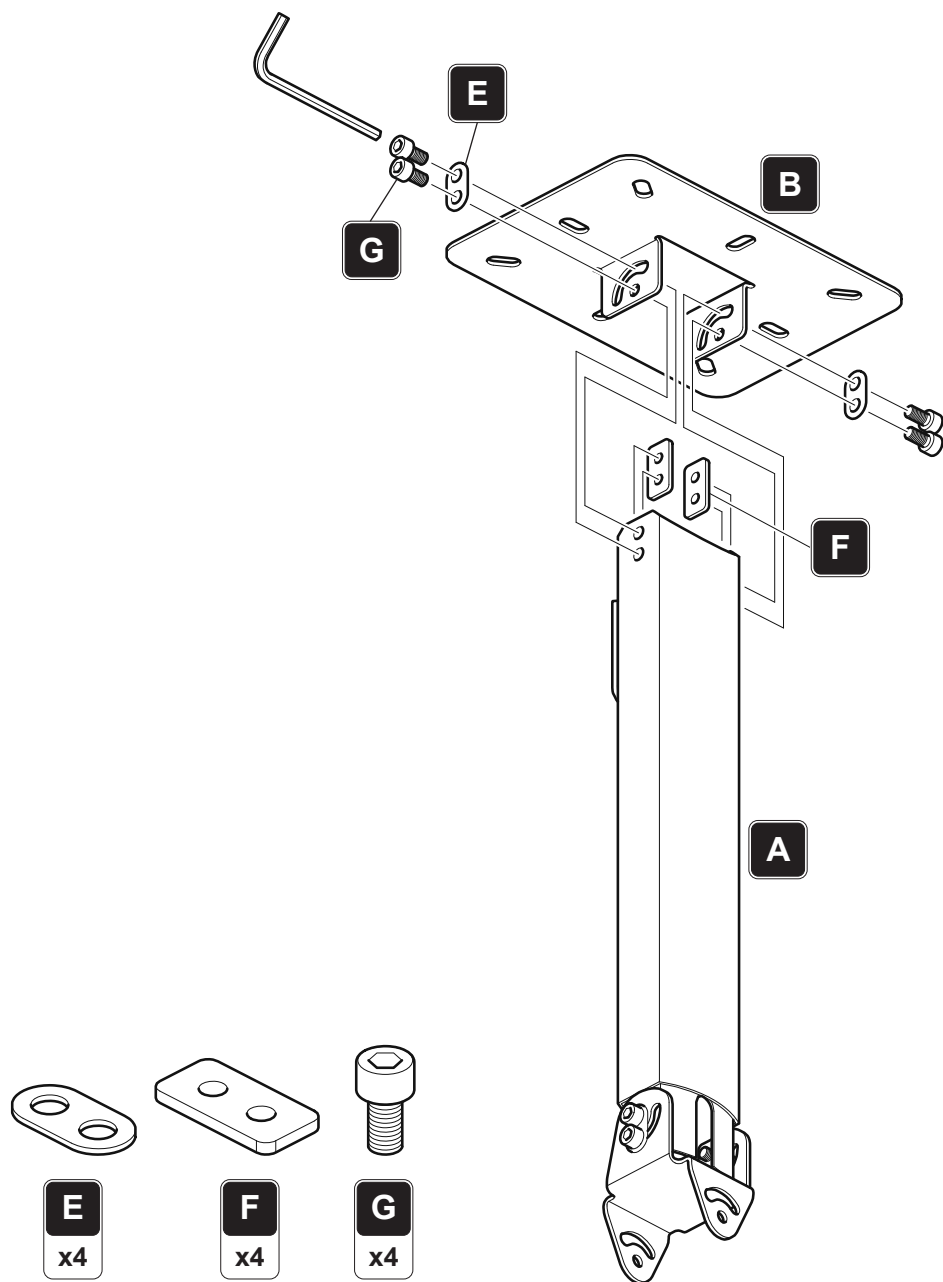




5

Different Locations




Please see below for examples of different Projector mounting locations.


Ceiling

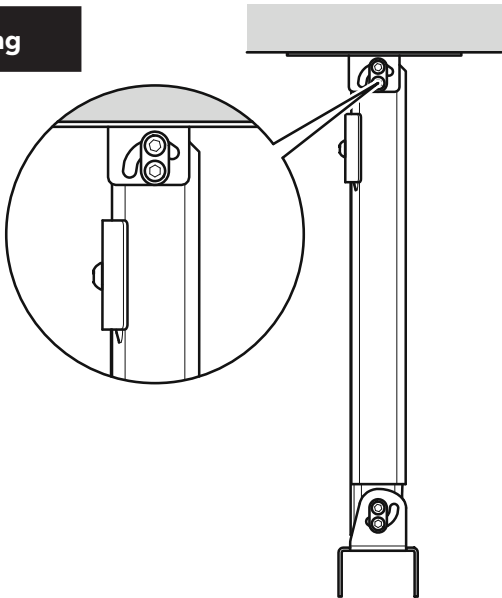

Wall

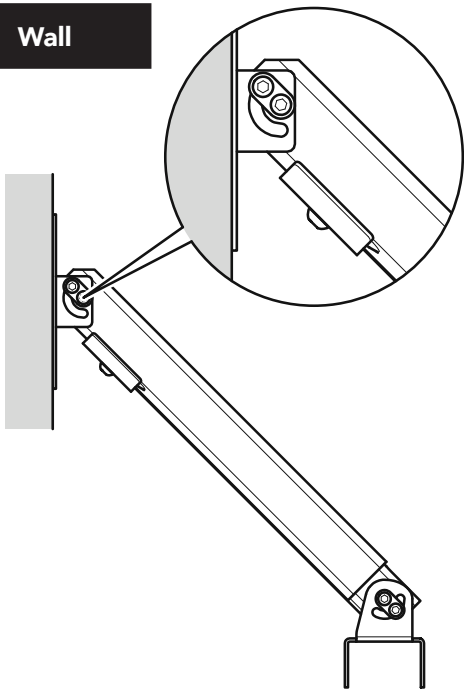



Sloped Ceiling

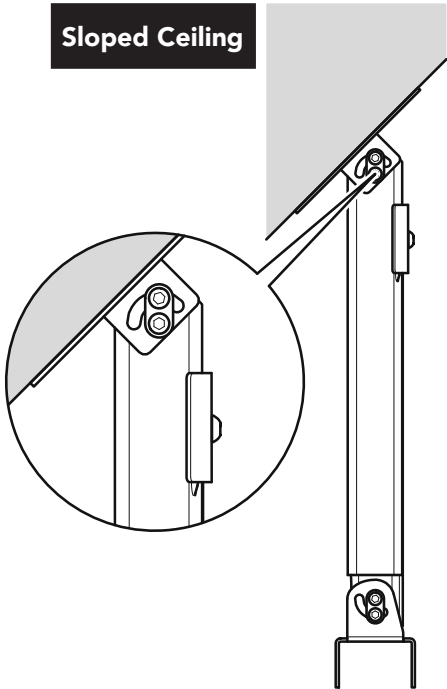

## 6 Fitting the Ceiling Bracket

**i** Please note, the fitting process is exactly the same if you fit to ceiling, wall or sloping ceiling.





### Solid Wall

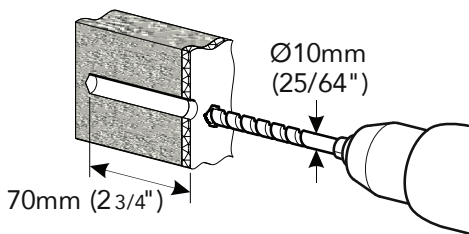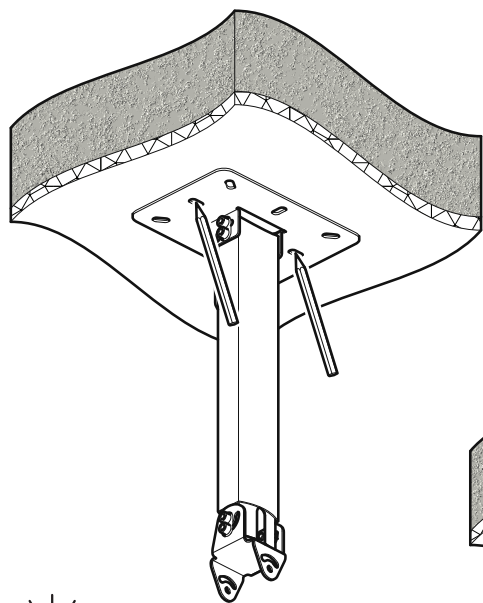

Remove Dust from Hole



Lubricate screw thread with soap

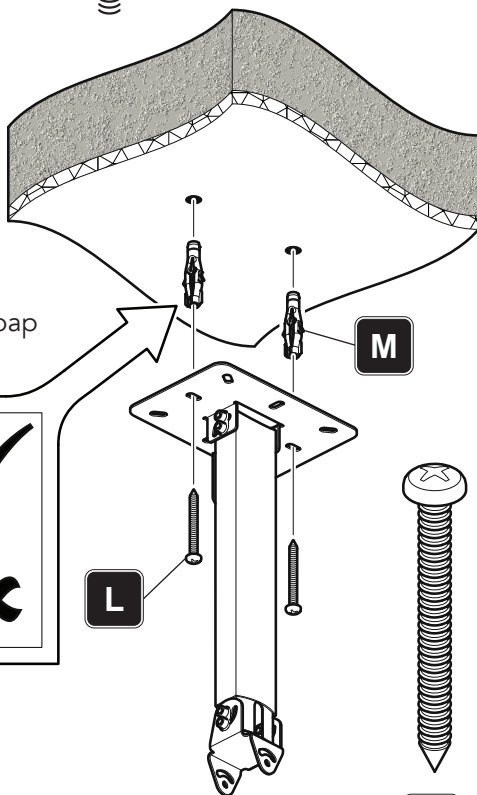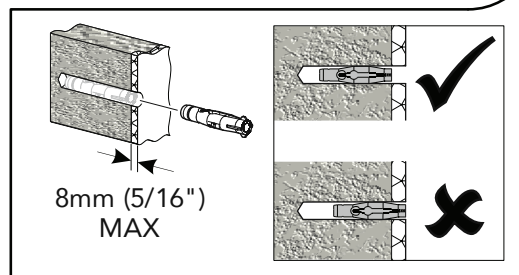



**L**  
x2

**M**  
x2




DO NOT overtighten screws.  
Tighten screws by hand only.

## Wood Stud

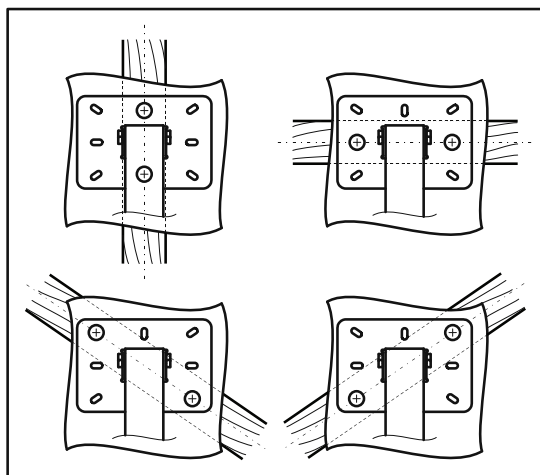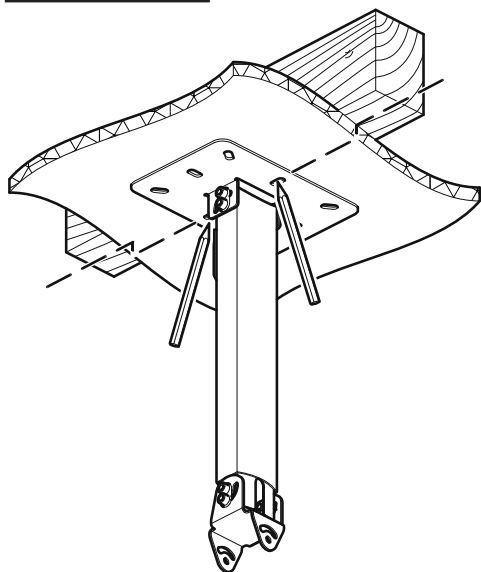

Ensure you drill in the centre of the wood stud.

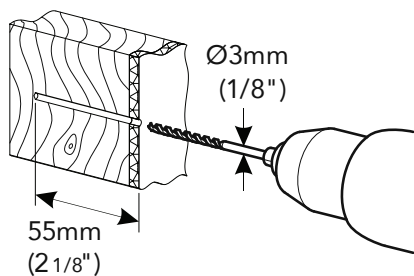


Lubricate screw thread with soap



DO NOT overtighten screws.  
Tighten screws by hand only.

DO NOT use wall plugs in a  
wood stud wall.


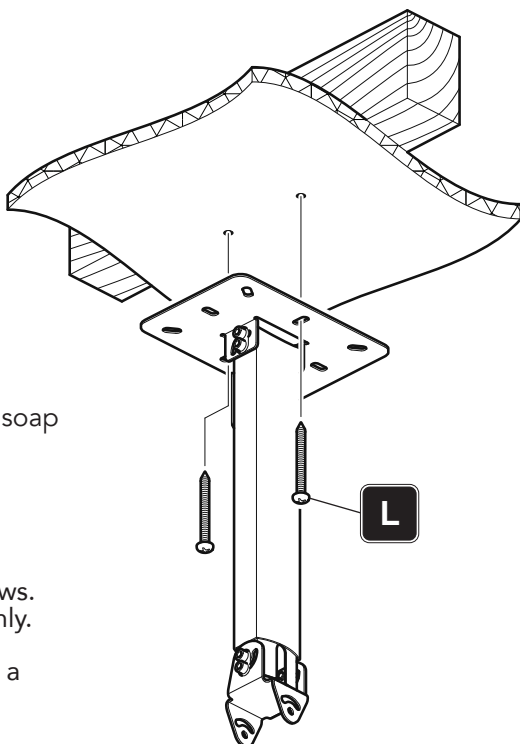


7



Attach the Projector



With Extendable Post

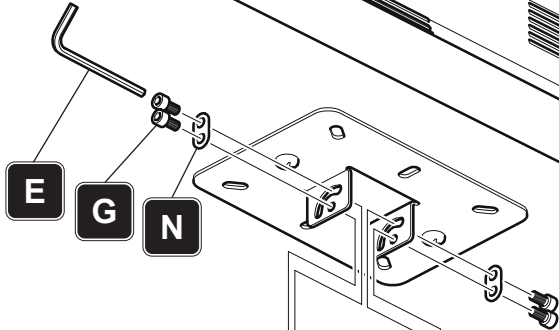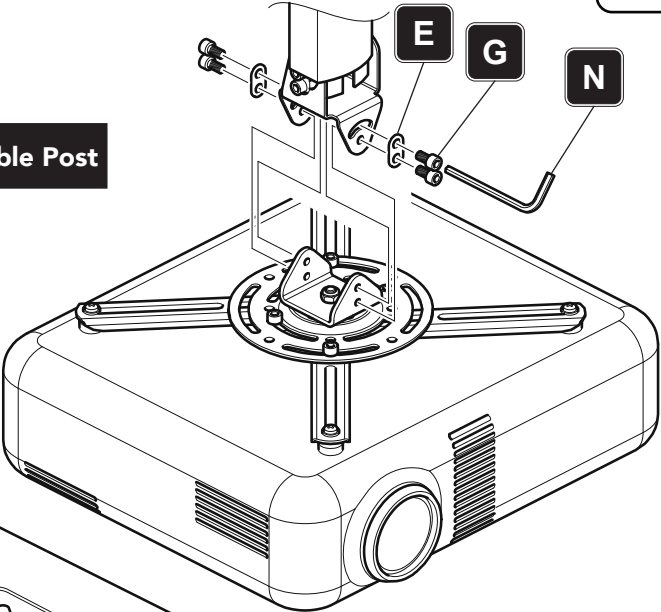

No Extendable Post

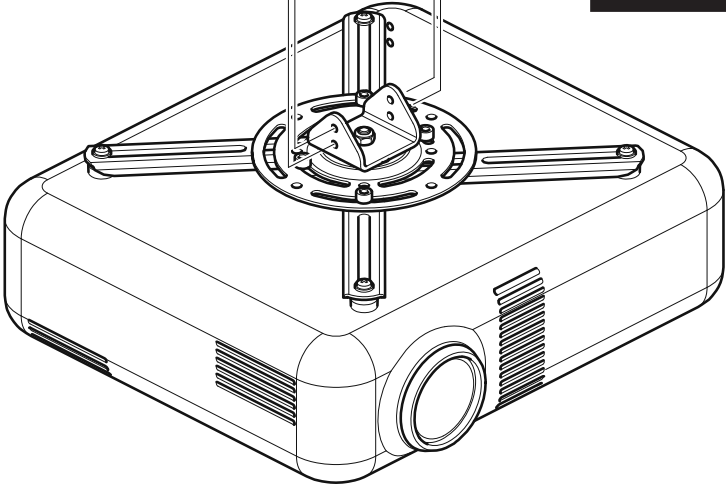


E  
x2

G  
x4


## 8

## Cable Management


i

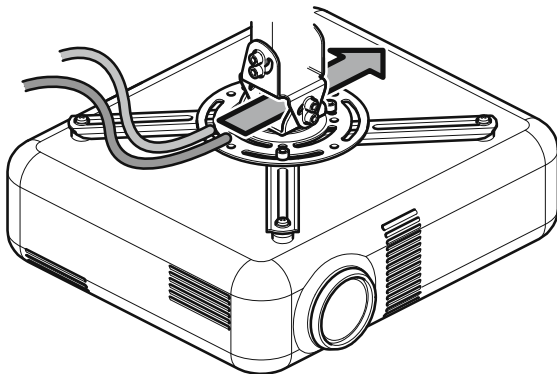




ii

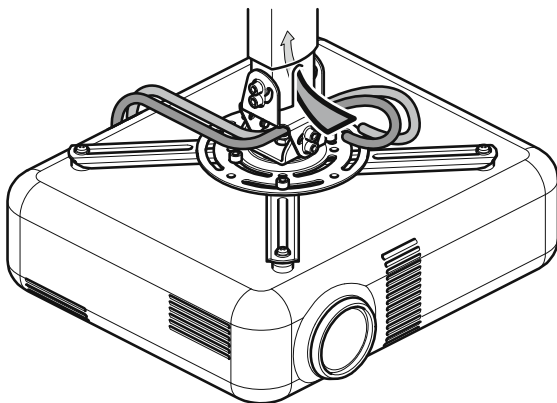

iii

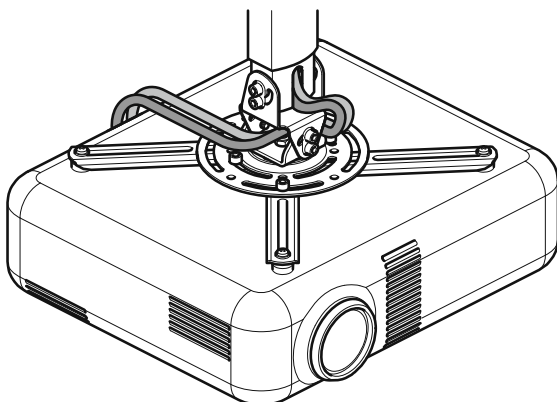

Ensure cables don't restrict movement.

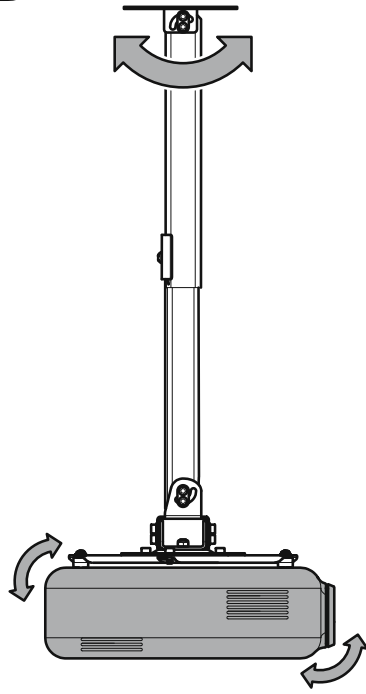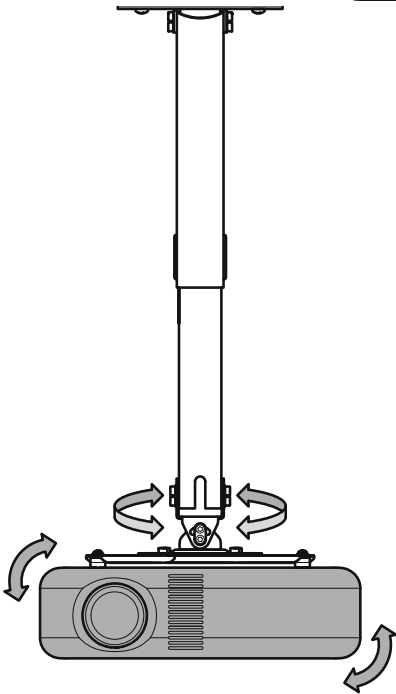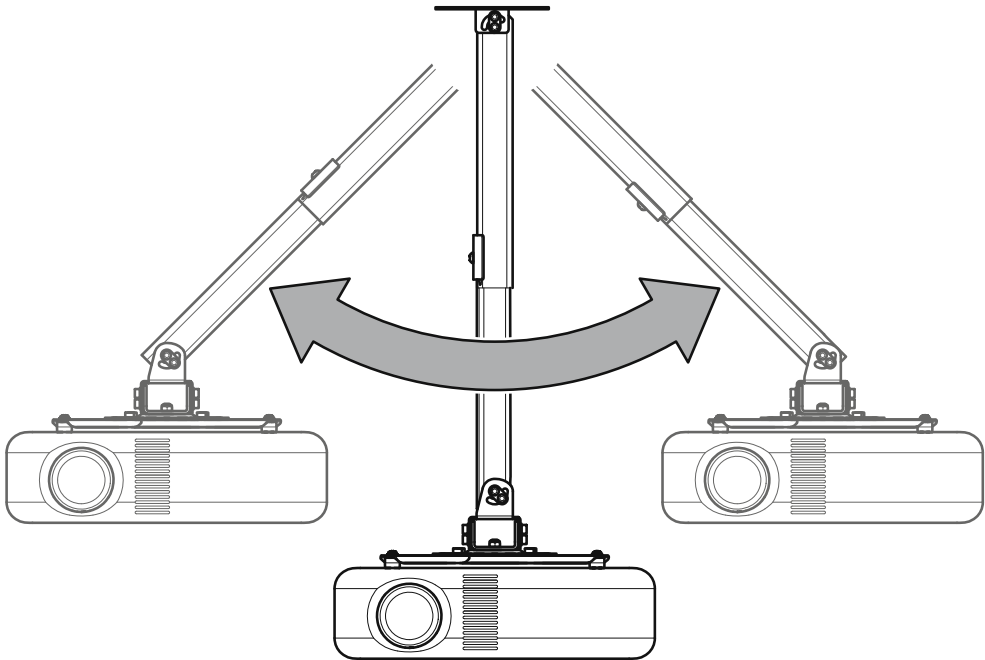


# 10

## Height Adjustment




Before loosening make sure the projector is fully supported.

i



ii

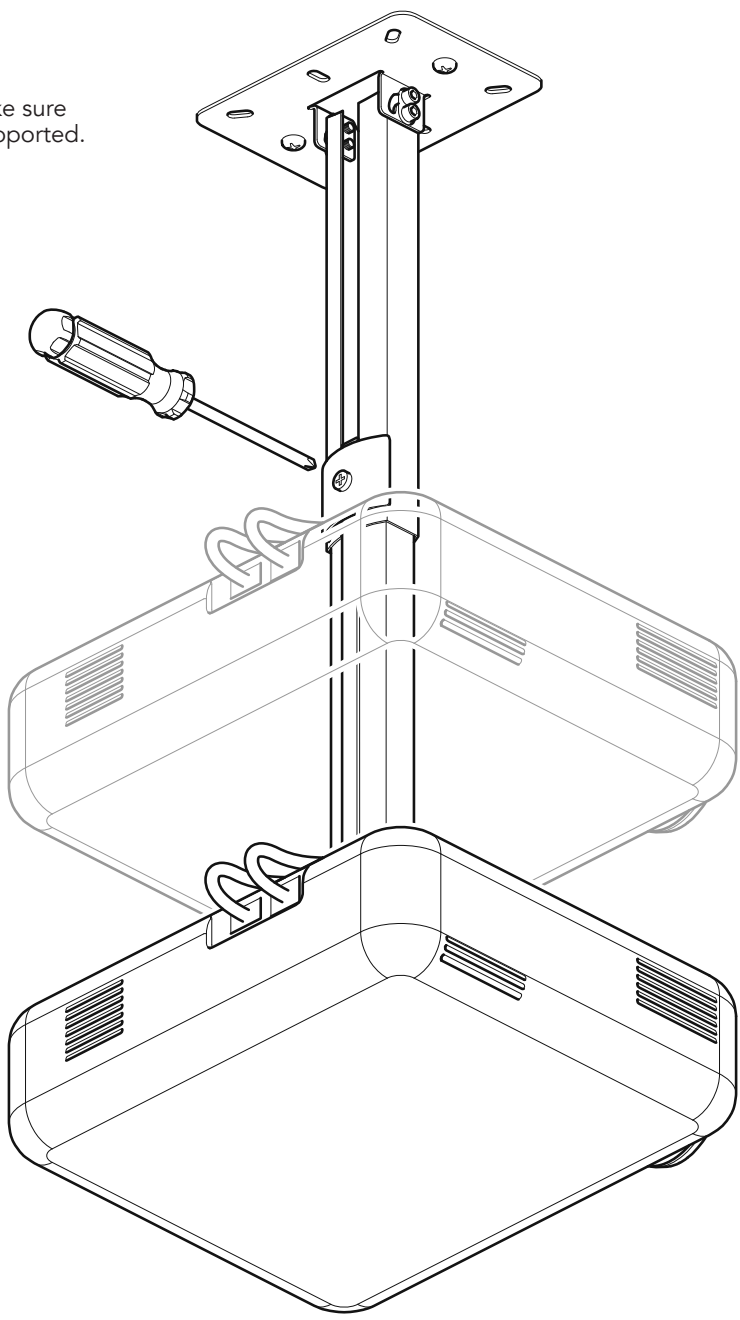

## 2 YEAR WARRANTY

AVF warrants that the product is free from defects in material and workmanship, as long as the product is owned by the original consumer purchaser. If, during the stated warranty of this product, it proves to be defective, AVF will remedy the defect by either repairing or replacing the defective part or, replacing the entire product. Proof of original purchase is required and should be retained.

AVF reserve the right to substitute replacement products to others of similar value and design (Usually in the event of discontinued product models).

AVF accept no responsibility for failures / loss which result from misuse, negligence, accident, improper assembly or installation or other causes beyond AVF's reasonable control and also excludes and will not pay any incidental and consequential damages.



**PLEASE REVIEW ALL NOTES AND PRODUCT INSTRUCTIONS BEFORE COMMENCING THE INSTALLATION.**

**INSTALLATION:** This product is sold as a home DIY product and as such, it is the responsibility of the installer to ensure that the product is correctly installed. AVF accept no responsibility if the product is incorrectly installed.

This product is intended for indoor use only. Use of this product outdoors could lead to failure and personal injury.

**IF YOU ARE IN ANY DOUBT, CONSULT A QUALIFIED CONTRACTOR.**

### NOTES

**WALLS:** It is the responsibility of the installer to ensure that the wall is of a suitable standard and void of any services (eg gas, electricity, water etc). AVF accept no responsibility for any damage or loss caused by installing this product in a sub standard wall.

**WALL FIXINGS:** Wall fixings are supplied for wood, brick, solid masonry and also, for some specific products, fixings are supplied for fixing to plasterboard.

### DO

- Retain all packaging in case the bracket needs to be returned.
- When fastening to wood studs, be sure to pre-drill holes into the wood stud.
- When fastening to brick or solid masonry, drill the holes in accordance with the instructions. Always remove drill dust from the hole before inserting the wall plug.
- Wall plug body must be fully inserted into the wall (ie fully into the brick).
- Lubricate the wall screws with soap to ease installation.
- Check the strength of the installation before fitting the TV.
- Periodically check strength of installation, signs of corrosion, damage or loose components.

### DON'T

- Do not set in mortar joints.
- Do not over tighten screws.

### TV HANGING

Must be carried out using the manufacturers threaded holes intended for this purpose. All variables of TV hanging screws are supplied within the product box (Because of the universal nature of this product, expect to have excess parts left over following your installation).

It is the responsibility of the installer to ensure the correct TV hanging screws are selected. If in doubt consult the TV manufacturer. AVF accept no responsibility for any damage caused by the use of the incorrect TV hanging screw or the use of incorrect fixing holes.