

2

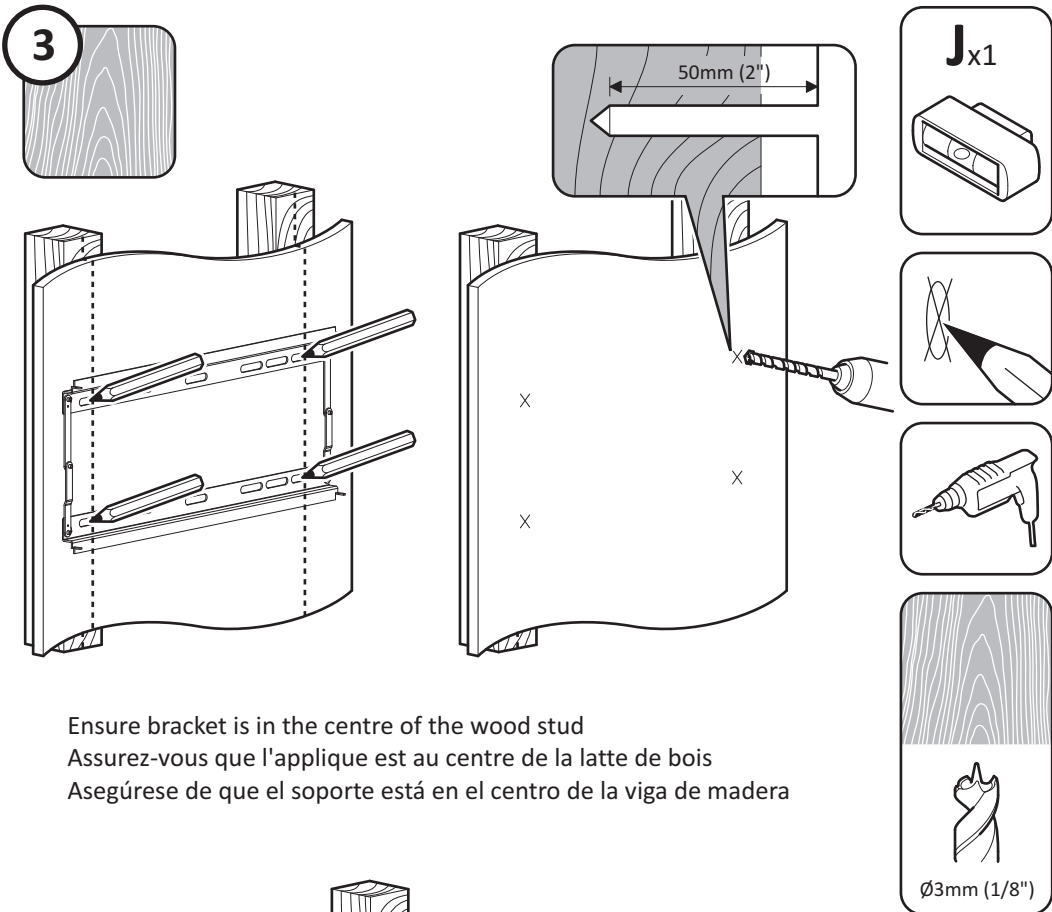
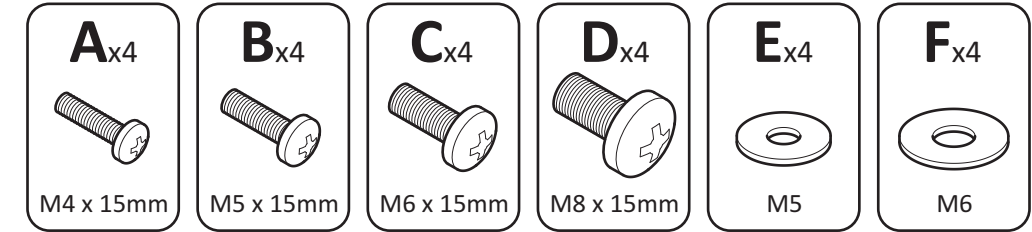


Diagram illustrating the assembly of the backrest frame. The frame is shown being attached to the backrest panel using four screws. The screws are labeled **F_{x4}** and **H_{x4}**. A note indicates to lubricate the screw thread with soap: "Lubricate screw thread with soap / Lubrifiez le pas de vis avec du savon / Lubrique la rosca del tornillo con jabón". A warning icon shows a screwdriver and a plus sign, indicating a warning or important note.

3

65mm (2 9/16")

X X X

Remove dust from hole
Retirez la poussière du trou
Elimine el polvo del agujero

Jx1

Ø8mm (5/16")

