

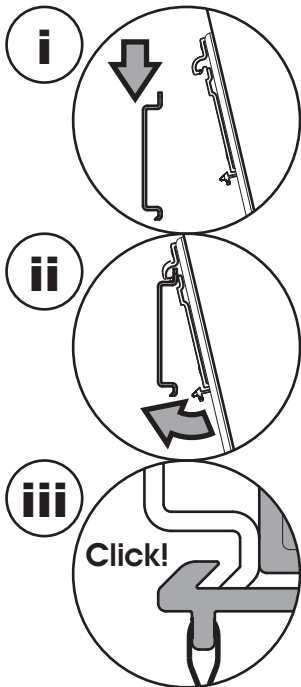


4

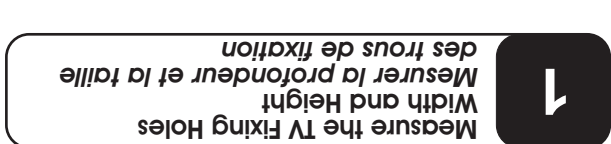


Optionnel

To remove TV
Pour oter la TV

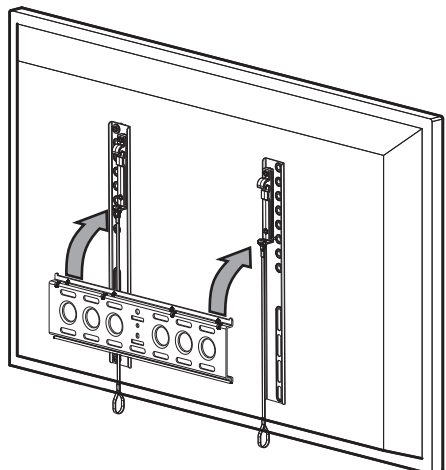

**TV Screws, Reducers
and Spacers
Vis TV, réducteurs et
séparateurs**

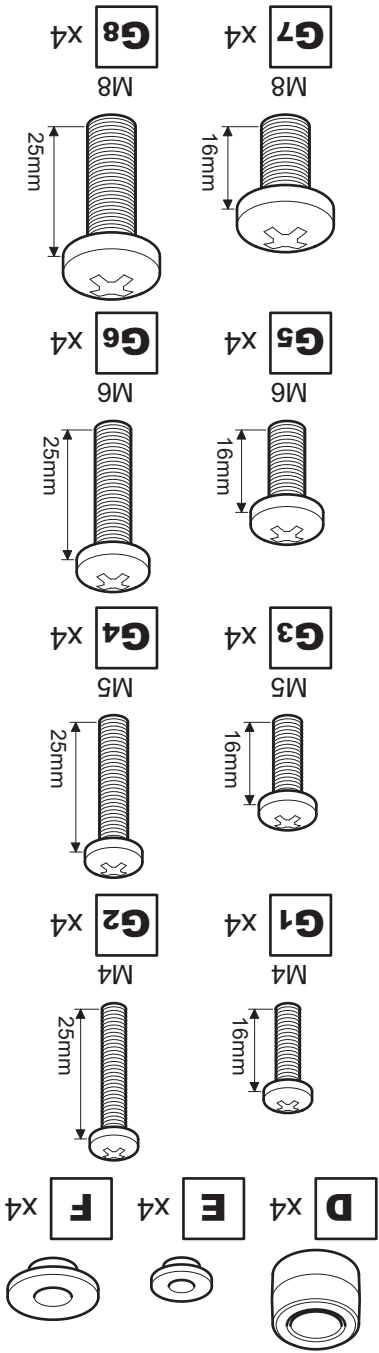

If width (X) is greater than 400mm or height (Y) is greater than 400mm STOP installation now and


M8 =	G7/G8
M6 =	G5/G6
M5 =	G3/G4
M4 =	G1/G2

You are provided with 4 diameters of TV fixing screws, **M4**, **M5**, **M6** and **M8**. Determine the screw diameter that fits and remember for step 2.

RNEL400B-F

English language / Langue Française

Leaflet No. / Notice n° **463601** rev 00

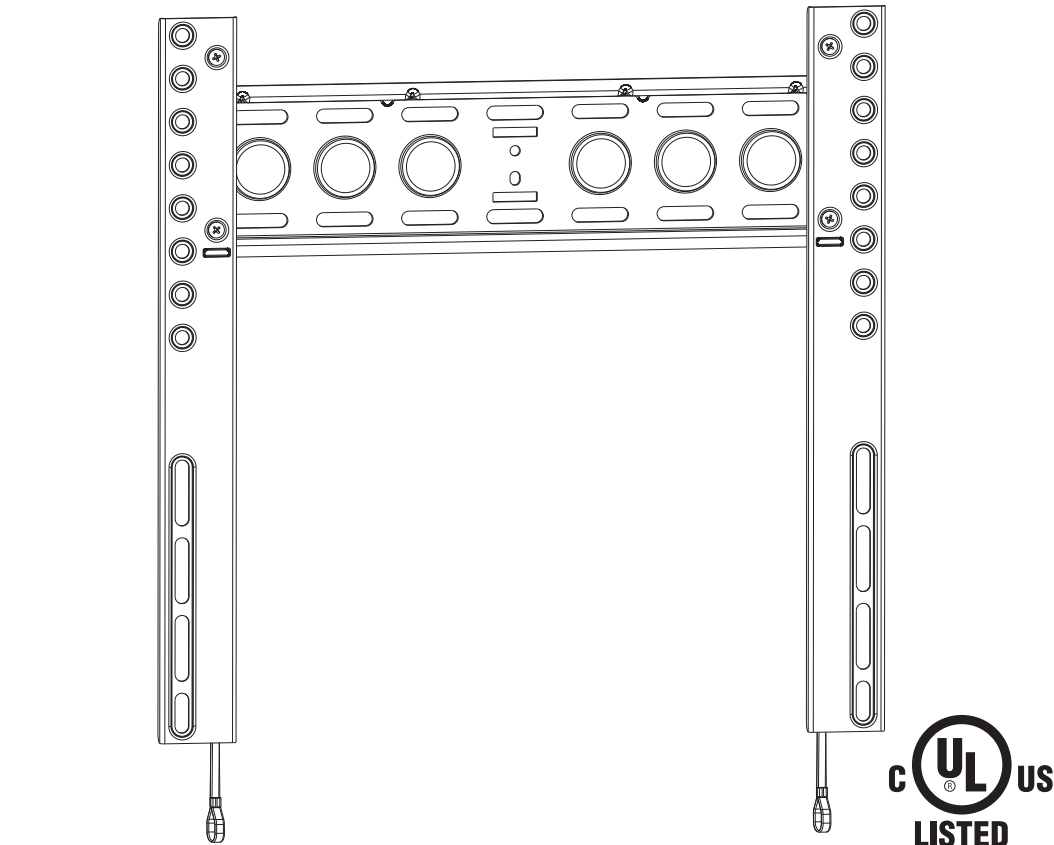

 **Read through ALL instructions before commencing installation.**
If you have any questions about this product or issues with installation contact the customer services help line before returning this product to the store.

ATTENTION *Lisez toutes les instructions avant de débuter l'installation.
Si vous avez des questions sur ce produit ou des problèmes
d'installation, contactez l'assistance client avant de ramener le produit
en magasin.*

1-800 601 8450 (USA)



47"
119cm

Orbital Holdings Inc. 3187, Cornerstone Drive, Mira Loma, CA 91752, USA

Fitting the TV Brackets

Installer l'applique téléviseur

For TVs with flat/unobstructed back
Pour des téléviseurs aux dos plats et non obstrués



For TVs with irregular/obstructed back
 Pour des téléviseurs aux dos irréguliers et
 non obstrués




After completing step 2 you will have fittings left over, please keep for future reference

Après avoir complété l'étape 2 il vous restera des pièces d'assemblage, conservez-les



Fitting the Wall Bracket

Installer l'applique murale

Concrete / Béton

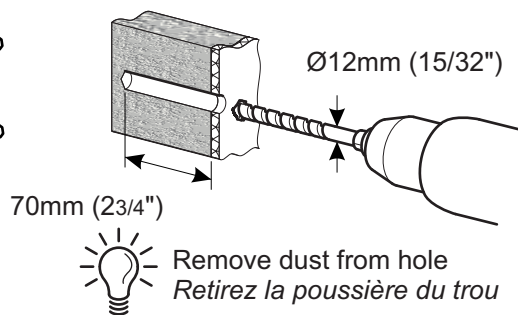

Remove dust from hole
Retirez la poussière du trou

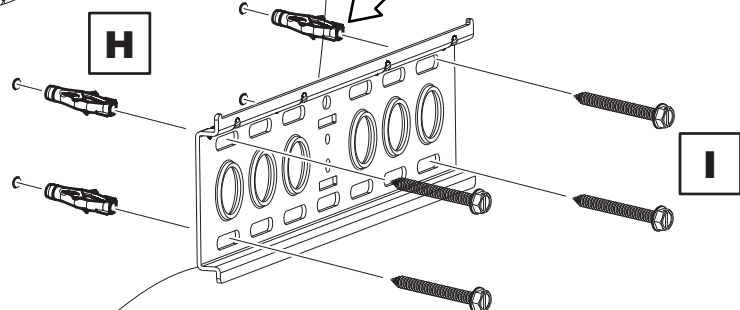

Lubricate screw thread with soap.
Lubrifiez le pas de vis avec du savon



DO NOT over tighten screws.
Tighten screws by hand only.
NE PAS visser les vis à fond.
Visser à la main



H x4





I x4

The diagram illustrates the correct and incorrect way to cut a cable. On the left, a cable is shown being cut with a diagonal line, marked with a checkmark, indicating the correct method. On the right, a cable is shown being cut with a horizontal line, marked with an 'X', indicating the incorrect method.




Ensure bracket is in the centre of the wood stud.
Assurez-vous que l'applique est au centre de la latte de bois

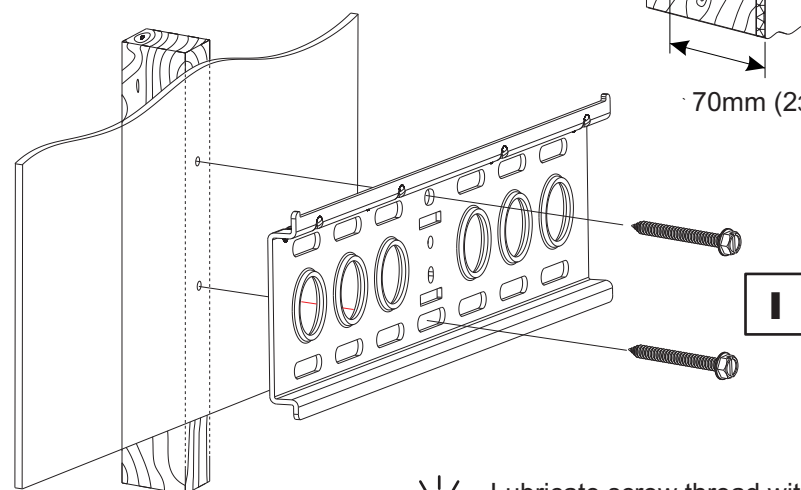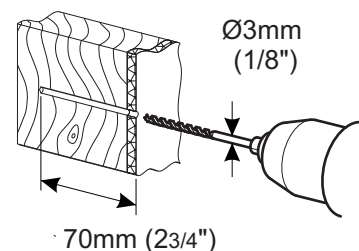

Lubricate screw thread with soap.
Lubrifiez le pas de vis avec du savon



DO NOT over tighten screws.
Tighten screws by hand only.
▲ *NE PAS visser les vis à fond.*
Visser à la main



I x2