




Lock tilt / Inclinaison verrouillée / Cerradura de la función de inclinación

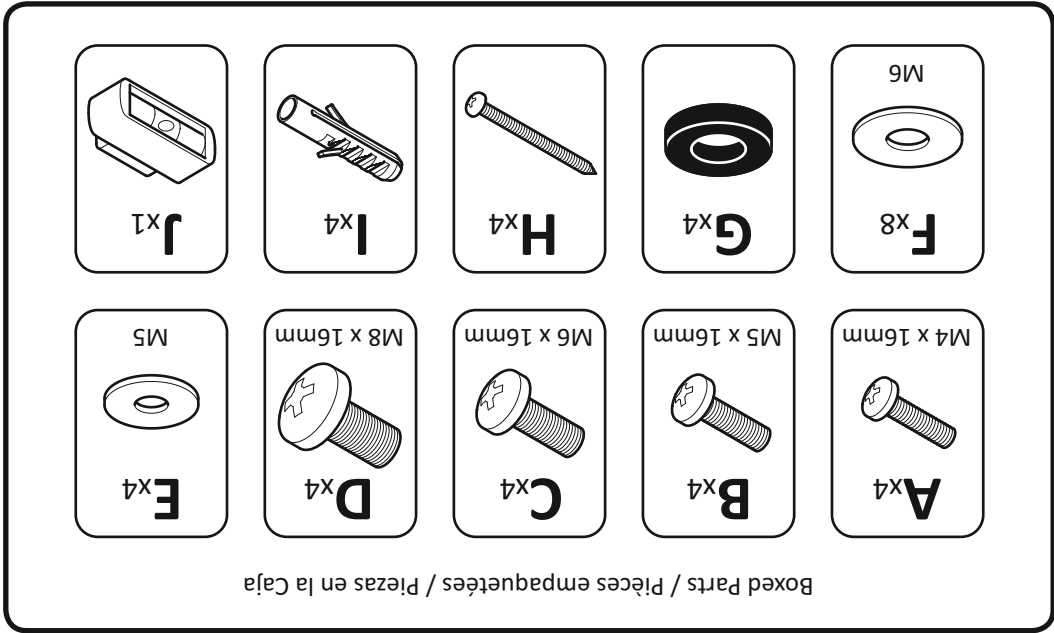

2

Top
Haut
Parte Superior

A_{x4}

M4 x 16mm

B_{x4}

M5 x 16mm

C_{x4}

M6 x 16mm

D_{x4}

M8 x 16mm

E_{x4}

M5

F_{x4}

M6

G_{x4}

TV

A+E
B+E
C+F
D

A+E+G
B+E+G
C+F+G
D+G

3

Concrete
Béton
Cemento

65mm (2 9/16")

12.5mm (1/2") Max

Remove dust from hole
Retirez la poussière du trou
Elimine el polvo del agujero

Ø8mm (5/16")

H_{x4}

I_{x4}

F_{x4}

M6

J_{x1}

Lubricate screw thread with soap
Lubrifiez le pas de vis avec du savon
Lubrique la rosca del tornillo con jabón

3

12.5mm (1/2") Min

50mm (2")

Ensure bracket is in the centre of the wood stud
Assurez-vous que l'applique est au centre de la latte de bois
Asegúrese de que el soporte está en el centro de la viga de madera

H_{x4}

F_{x4}

M6

J_{x1}

TV

4

i

ii