
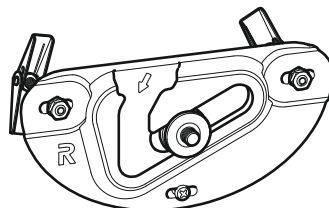


RML8300-F

English Language

Leaflet No. 464843 rev01

##

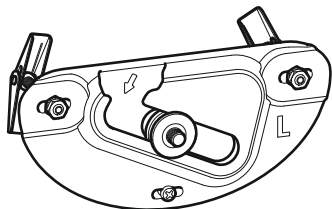

*Read through ALL instructions before commencing installation.
If you have any questions about this product or issues with installation
contact the customer services help line before returning this product to
the store. See ca.orbitalholdings.com/p/RML8300-F*

CUSTOMER SERVICES HELP LINE NUMBER:


1-800 667 0808 (USA)




AVF Group, Inc. 2775 Broadway, Cheektowaga, Buffalo, New York, 14227 USA

Assembly Overview


Fit Screen Hangers to TV

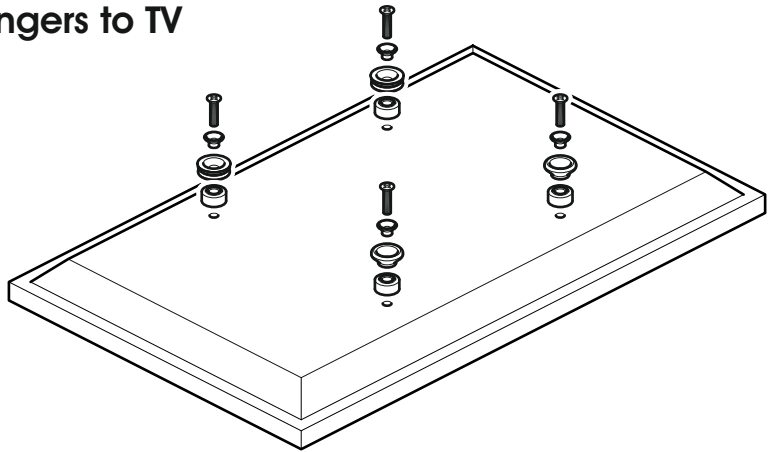

Fitting the Wall Bracket

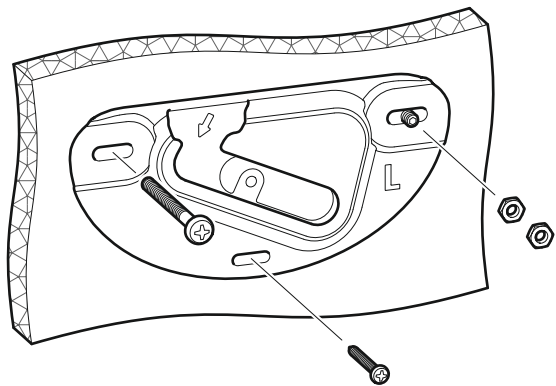

Hanging the TV

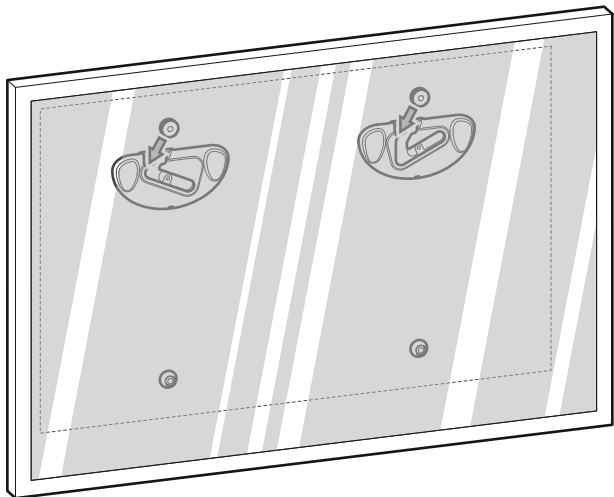

Index

1 Measure the TV fixing holes Width and Height

2 Fit Screen Hangers to TV

3 Assemble Positioning Template

4 Determine Bracket Hole Centers

5 Marking Wall For Drill Points

6 Fitting the Wall Bracket

7 Hanging the TV

Retain all packaging in case the bracket needs to be returned.

Contents may vary from photography / Illustrations.


You will not need all these parts, so expect there to be some left over depending upon the specification of your TV.

This product is intended for indoor use only. Use of this product outdoors could lead to failure and personal injury.





It is the responsibility of the installer to ensure that the mounting wall is of a suitable standard and void of any services (eg gas, electricity, water etc).

AVF accept no responsibility for any damage or loss caused by installing this product in a sub standard wall.


Tools Recommended

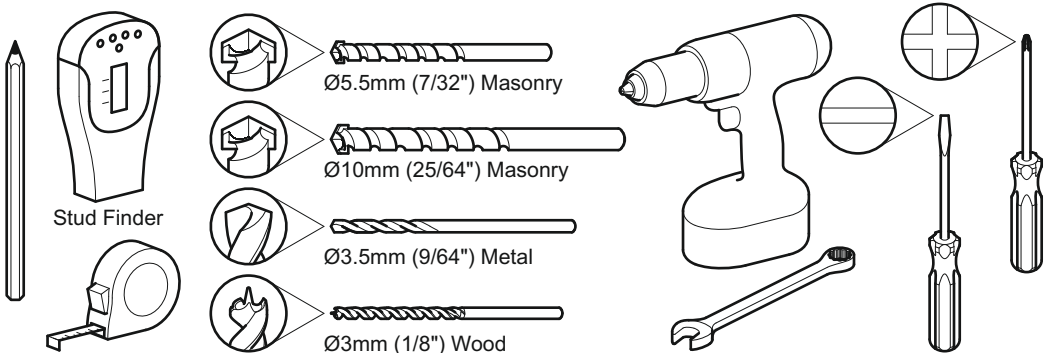


Boxed Parts

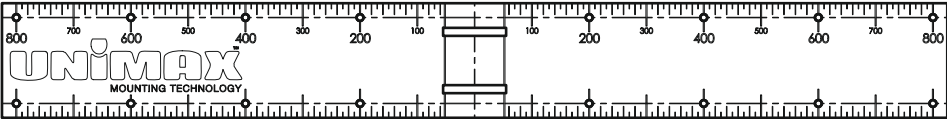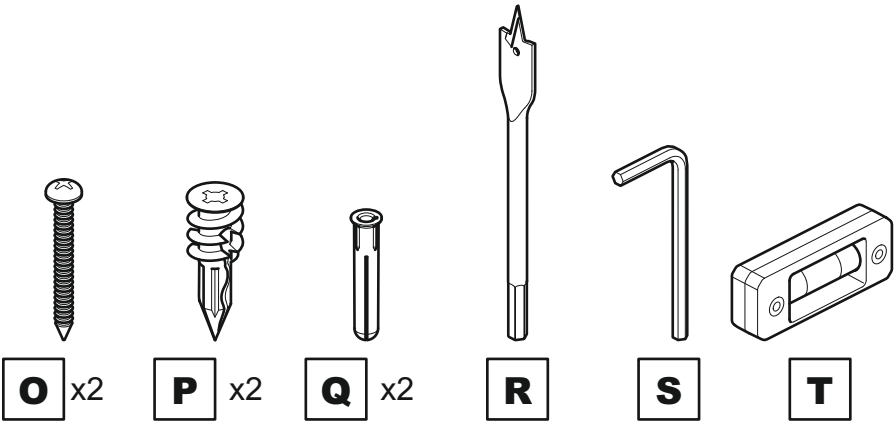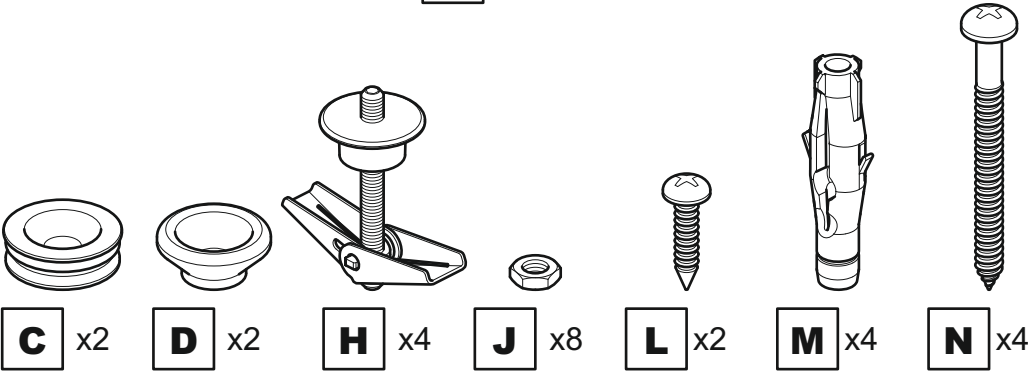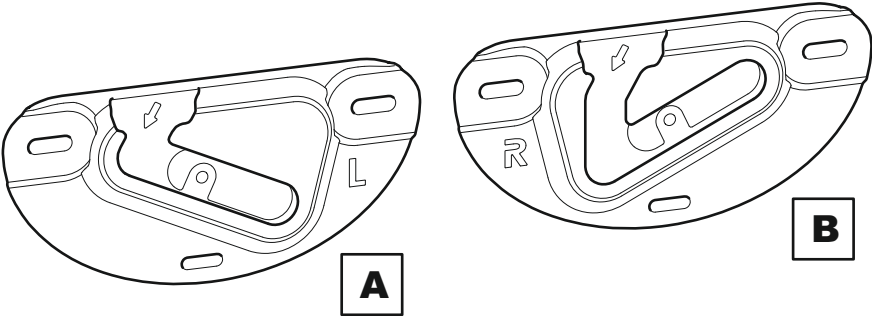

TV Screws, Reducers and Spacers

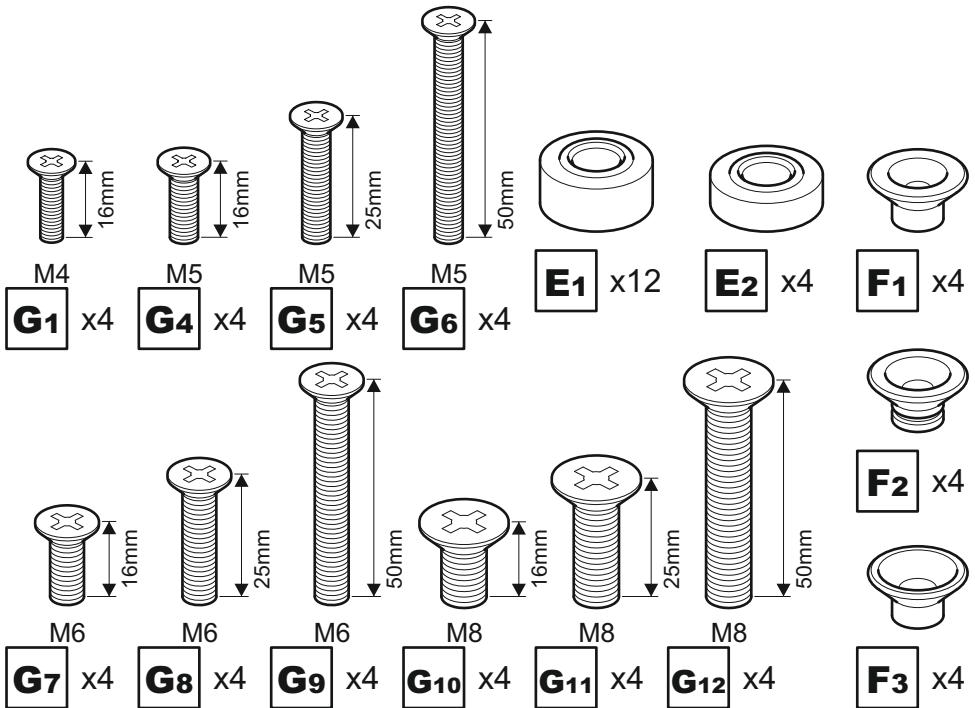

1 Measure the TV fixing holes Width and Height

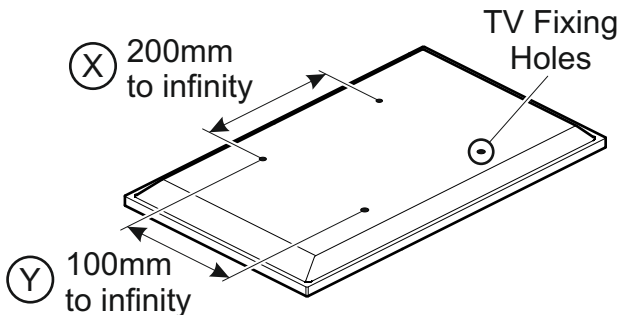


If width (X) is less than 200mm or height (Y) is less than 100mm STOP installation now and contact the customer help line

You are provided with 4 diameters of TV fixing screws, **M4**, **M5**, **M6** and **M8**. Determine the screw diameter that fits and remember for step 2.



After completing step 2 you will have TV fixing screws left over, please keep for future reference

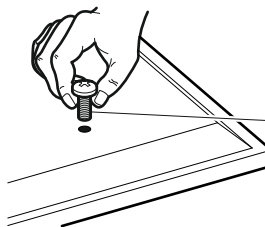


M4 =	G1
M5 =	G4-G6
M6 =	G7-G9
M8 =	G10-G12

2 Fit Screen Hangers to TV

Once you have established which screw diameter you need for your TV you will need to choose which wall spacing you require. Check the back of your TV and use the **OPTION** that fits your TV. Please see page opposite for more details.

OPTION 1


12mm Wall Space



Suitable for TVs with a flat back and no obstructions

OPTION 2


20mm Wall Space



Suitable for TVs with small to medium obstructions eg power supply, mouldings etc


OPTION 3

40mm Wall Space

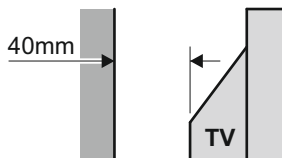


Suitable for TVs with large obstructions eg power supply, mouldings etc

Top Fixings

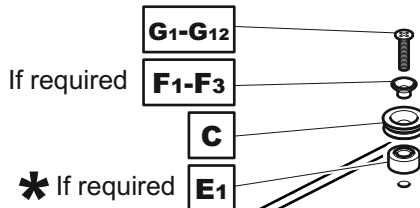


If required

Bottom Fixings



If required

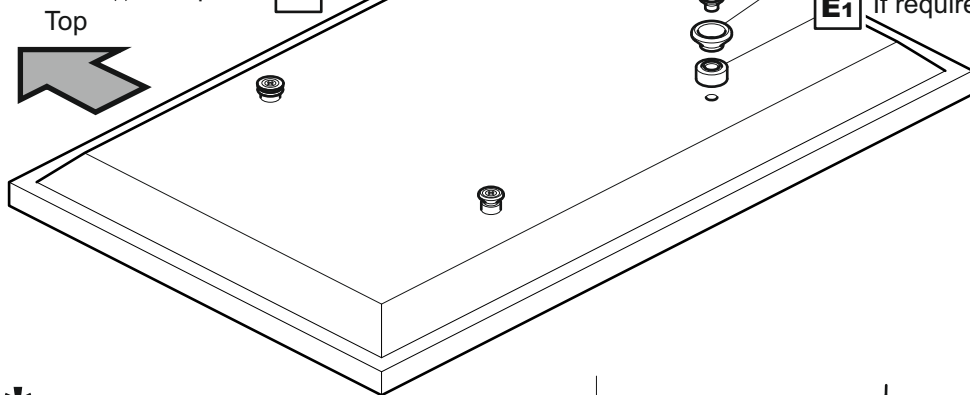


In certain circumstances it may be necessary to use red spacer **E2** as either a replacement or addition to spacer **E1**.


When is it necessary to use red spacers **E2**?

It is recommended that when fitting Hangers **C** and Stand-offs **D** to your TV you have at least 5-10mm of screw engagement. In certain circumstances you may need to use red spacers **E2** as either a replacement, or together with spacers **E1** to achieve this. Whenever you use red spacers **E2** you must use all 4 provided.

Problem
Not enough screw engagement















Solution
Red spacer **E2** has replaced spacer **E1**















OPTION 1 12mm Wall Space

Top Fixings

M4	M5	M6	M8
 G1	 G4	 G7	 G10
 F1	 F2	 F3	 F10
 C	 C	 C	 C













Bottom Fixings

M4	M5	M6	M8
 G1	 G4	 G7	 G10
 F1	 F2	 F3	 F10
 D	 D	 D	 D













OPTION 2

20mm Wall Space. Not applicable for M4 fixings **G1**

Top Fixings

M5	M6	M8
 G5	 G8	 G11
 F2	 F3	 F11
 C	 C	 C
 E1	 E1	 E1



















Bottom Fixings

M5	M6	M8
 G5	 G8	 G11
 F2	 F3	 F11
 D	 D	 D
 E1	 E1	 E1



















OPTION 3

40mm Wall Space. Not applicable for M4 fixings **G1**

Top Fixings


M5	M6	M8
 G6	 G9	 G12
 F2	 F3	 F12
 C	 C	 C
 E1	 E1	 E1
 E1	 E1	 E1
 E1	 E1	 E1

Bottom Fixings

M5	M6	M8
 G6	 G9	 G12
 F2	 F3	 F12
 D	 D	 D
 E1	 E1	 E1
 E1	 E1	 E1
 E1	 E1	 E1

3


Assemble Positioning Template

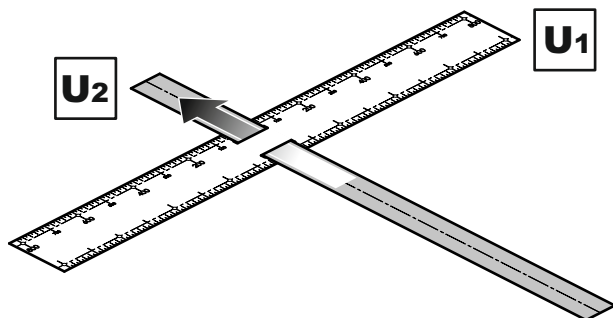

4

Determine Bracket Hole Centers


Lay the template on the back of the TV and follow the instructions below.

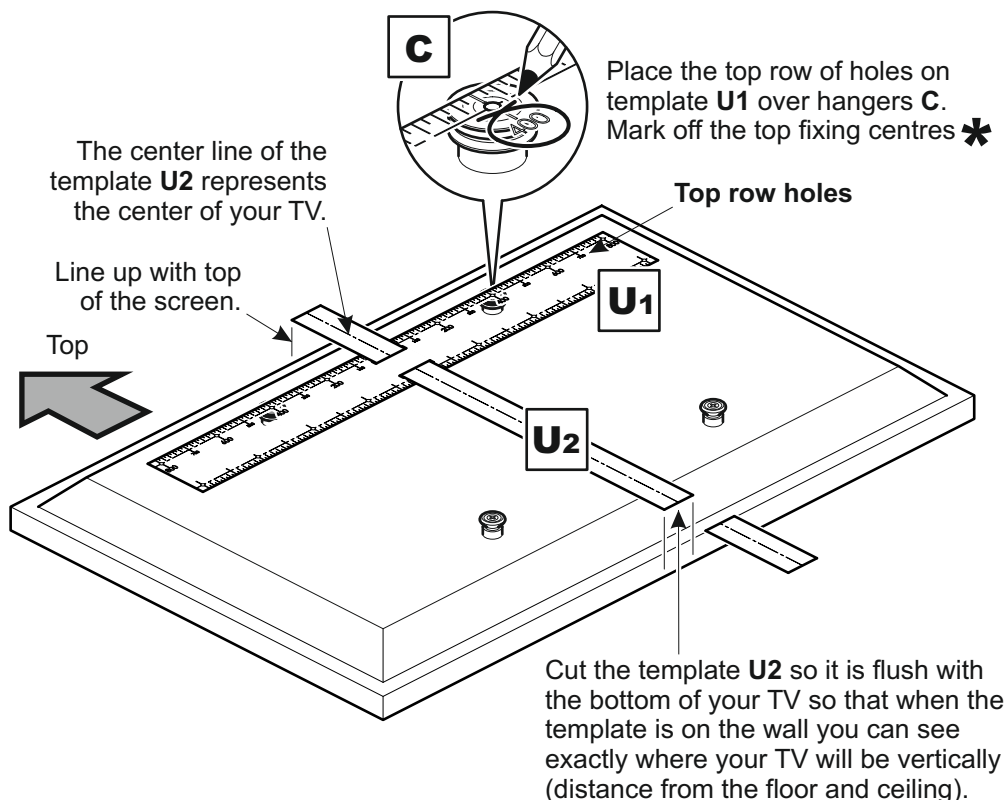


* If hangers **C** do not line up with any holes on the template then ensure template is firmly in position and punch 2 holes to match your top fixing centres with a pencil or sharp object.

5 Marking Wall For Drill Points

Before marking the wall, determine the wall type that you have (i.e. Solid Wall/ Dot & Dab/ Plasterboard/ Wood Stud/Metal Stud). Ensure the drilling area is free from mains services (Gas/Electric/Water).

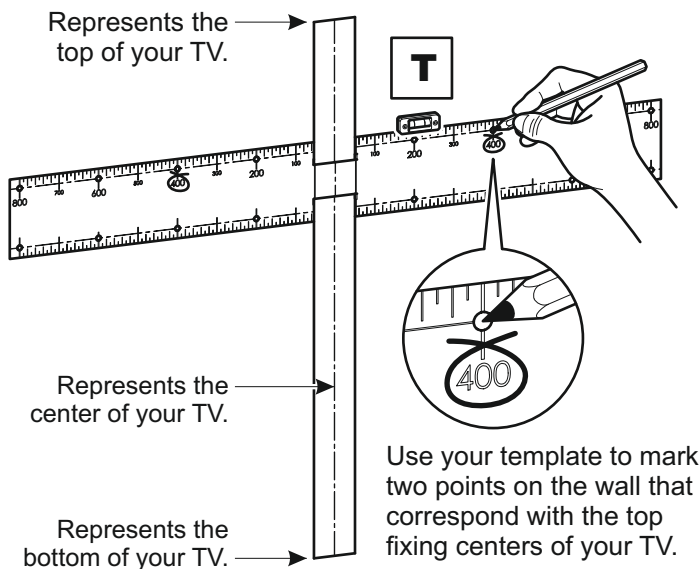

Next, use the Wall Brackets **A** and **B** as a template and position them over the appropriate **PENCIL MARKS** you have made, so that the mark is in the middle of the **CENTRAL HOLE** of the Wall Bracket. Ensure the bracket is level and mark the three **DRILL POINTS** with a pencil. Repeat for other bracket. Drill six 3mm pilot holes and select appropriate fixings (see section 6)




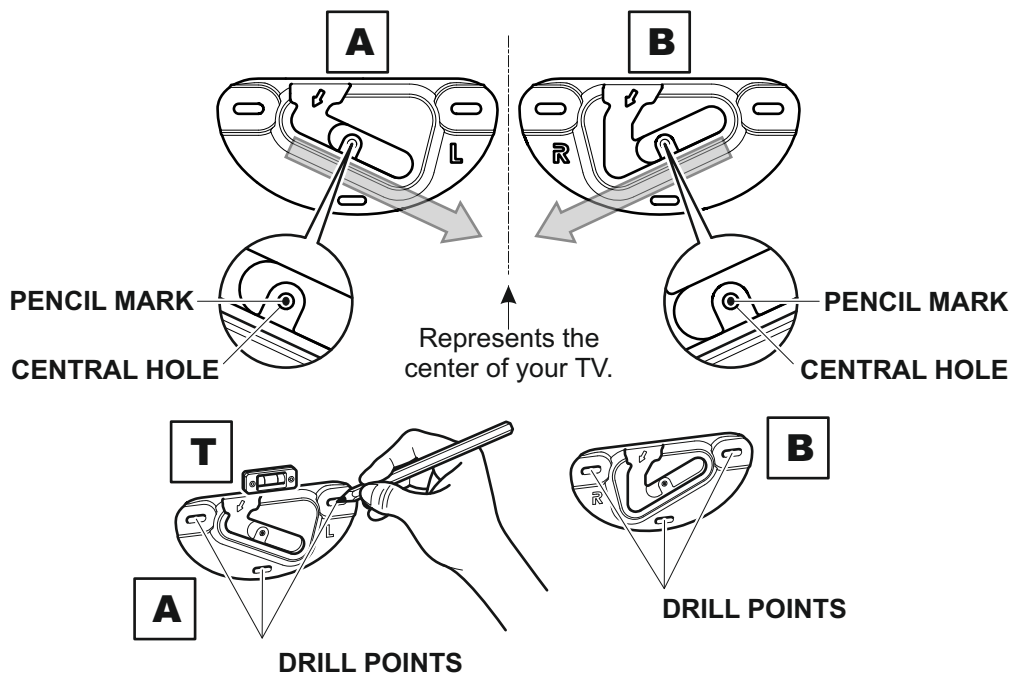


6

Fitting the Wall Bracket





Use the correct fixings for your wall type. Mixing fixing screws may be required for installations that span different wall types. **DO NOT OVER TIGHTEN SCREWS.**

Solid Wall

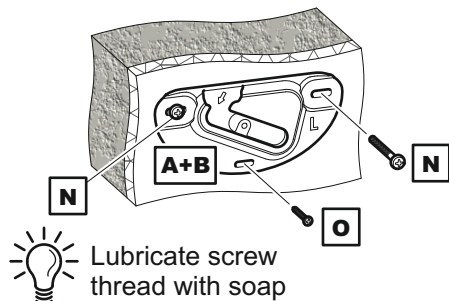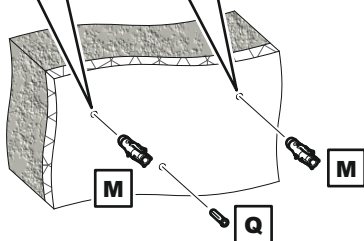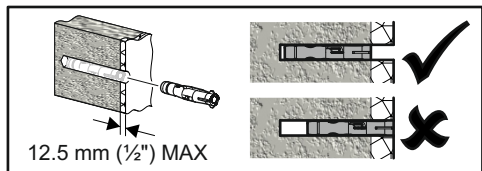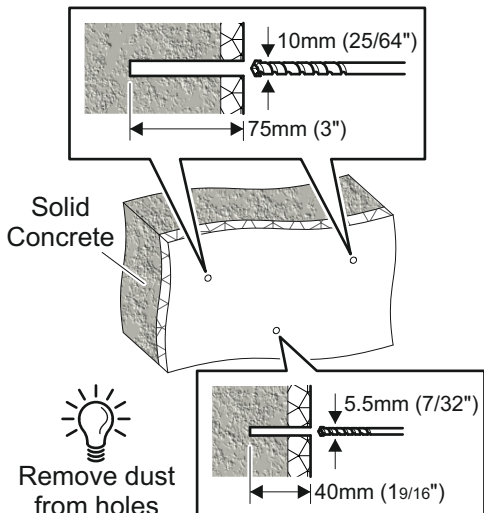







Drywall

Min supporting surface specification:- 1/2" thick drywall, mounted on 1 1/2" x 3 1/2" wood stud at 16" centers.

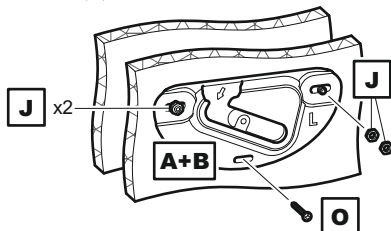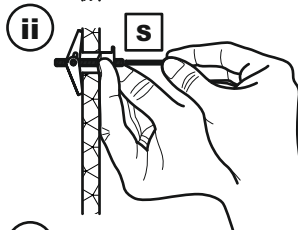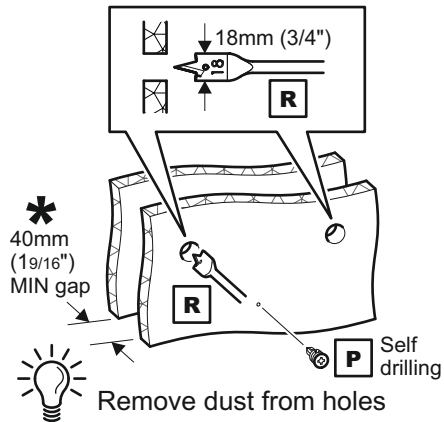

Wood Stud




Min supporting surface specification:-
1/2" thick drywall

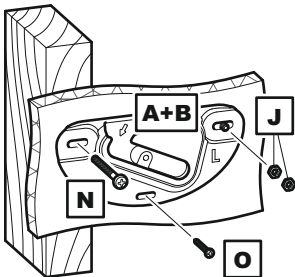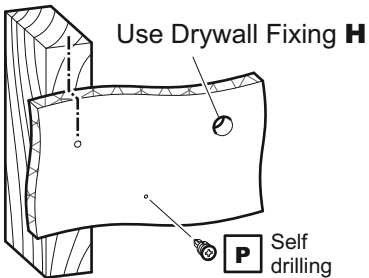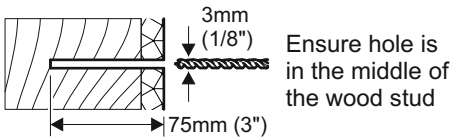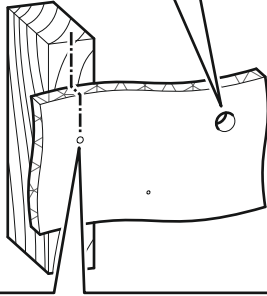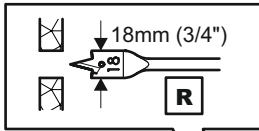



Only one fixing will be in the wood stud. The other fixings will be in drywall (see above)

Metal Stud

Min supporting surface specification:-
1/2" thick drywall

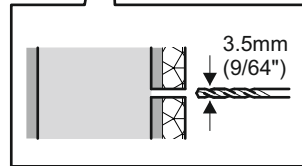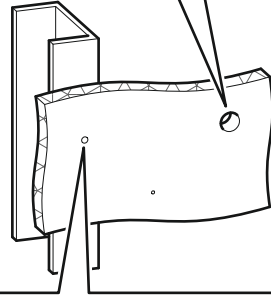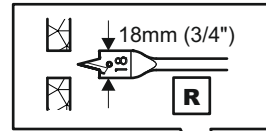

0.6mm (0.025") MIN stud thickness

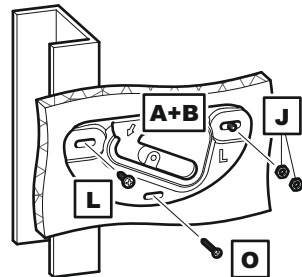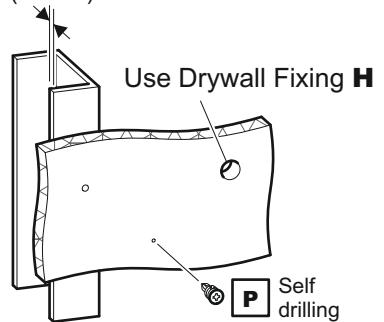






Only one fixing will be in the metal stud. The other fixings will be in drywall (see above)

7 Hanging the TV

Hanging the TV is a two person job.

Present hangers **C** (on the back of the TV) to the opening on brackets **A** & **B**. Slide down and across into place. Ensure both hangers are fully engaged. If cables from the TV prevent the TV resting against the wall then an alternative hanger configuration will be required (see section 2).

TV must be parallel to wall. Use spacers / stand-offs as shown in section 2.

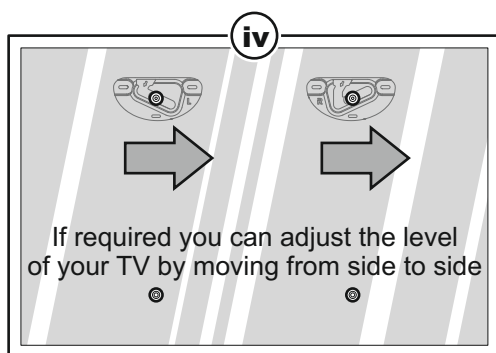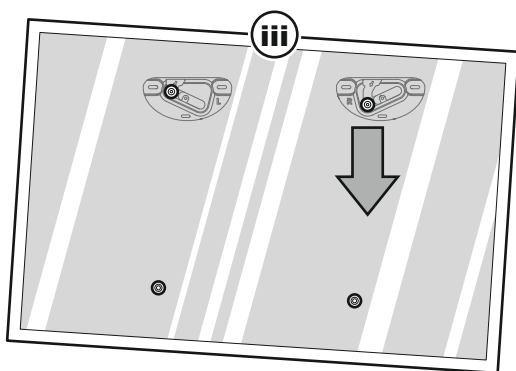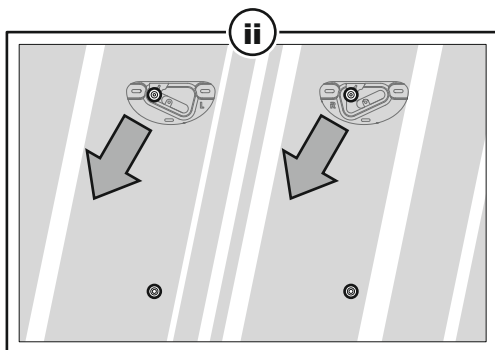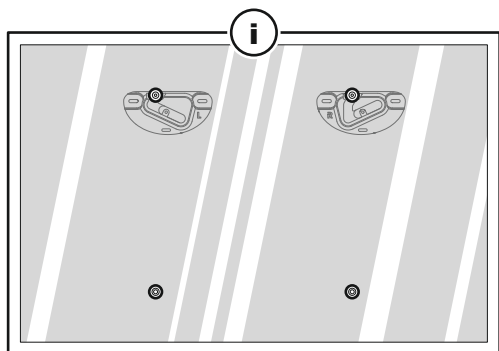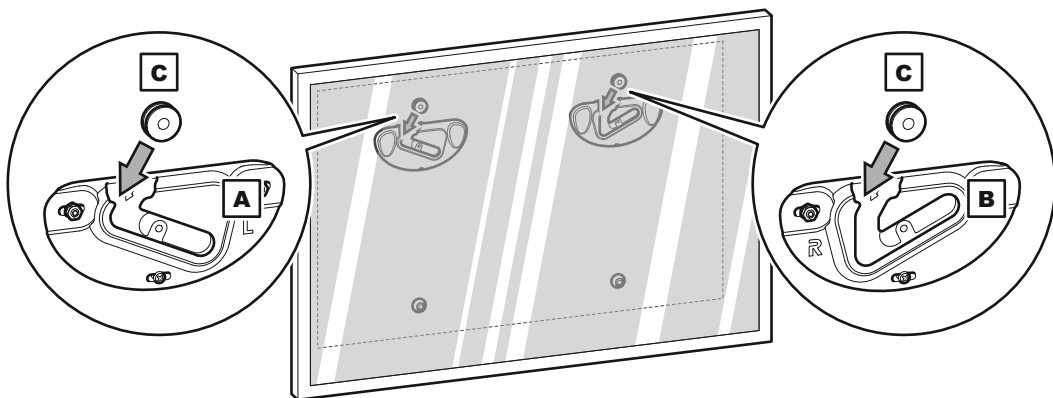

Removing the TV

This is a two person job. To remove the TV reverse the movements as shown above.